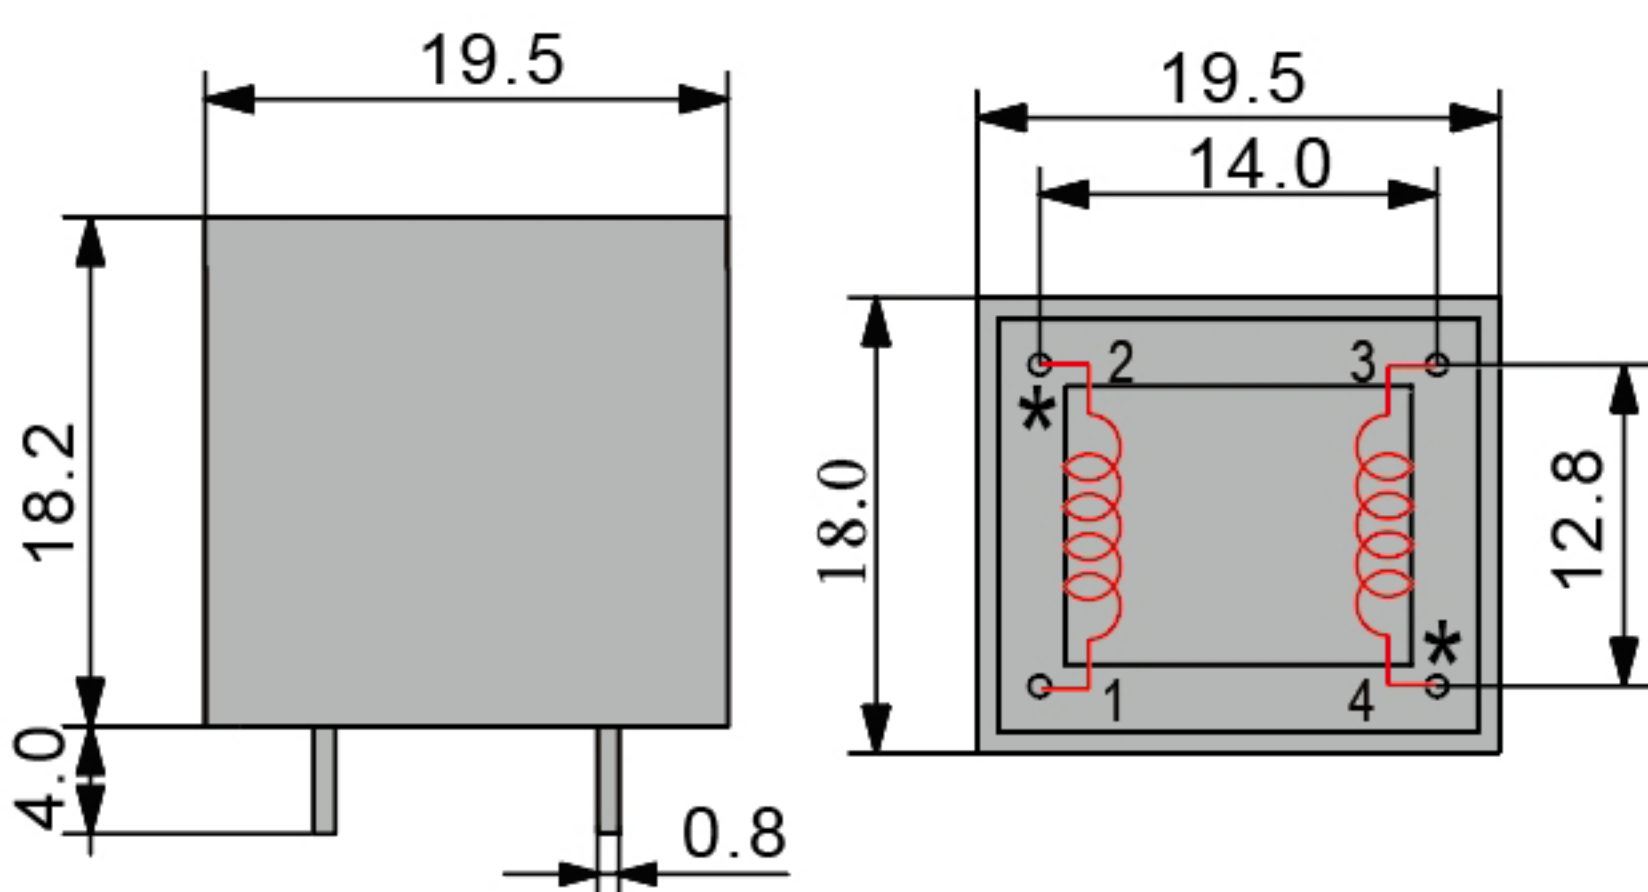
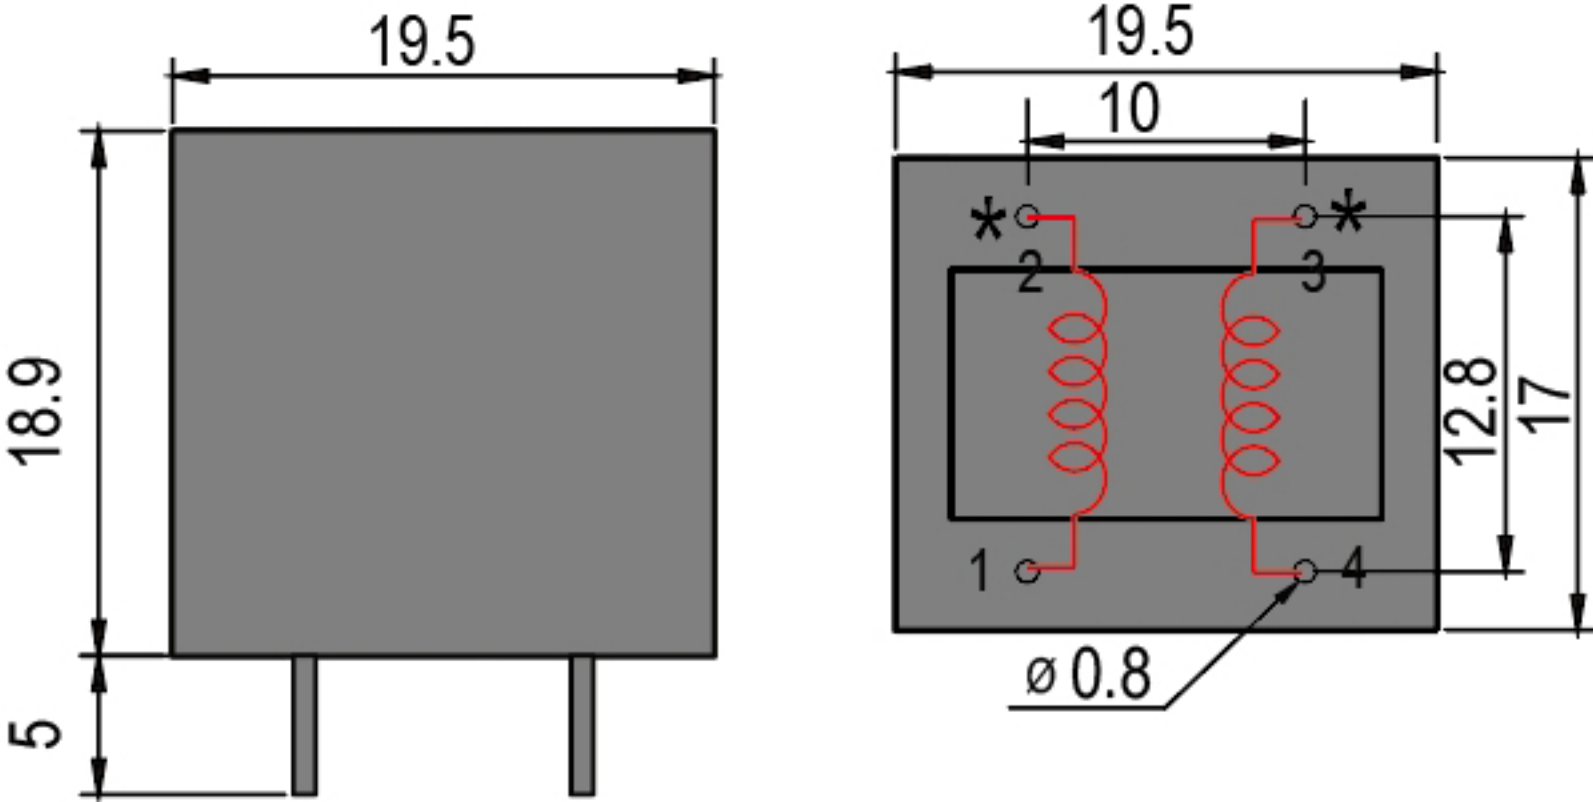
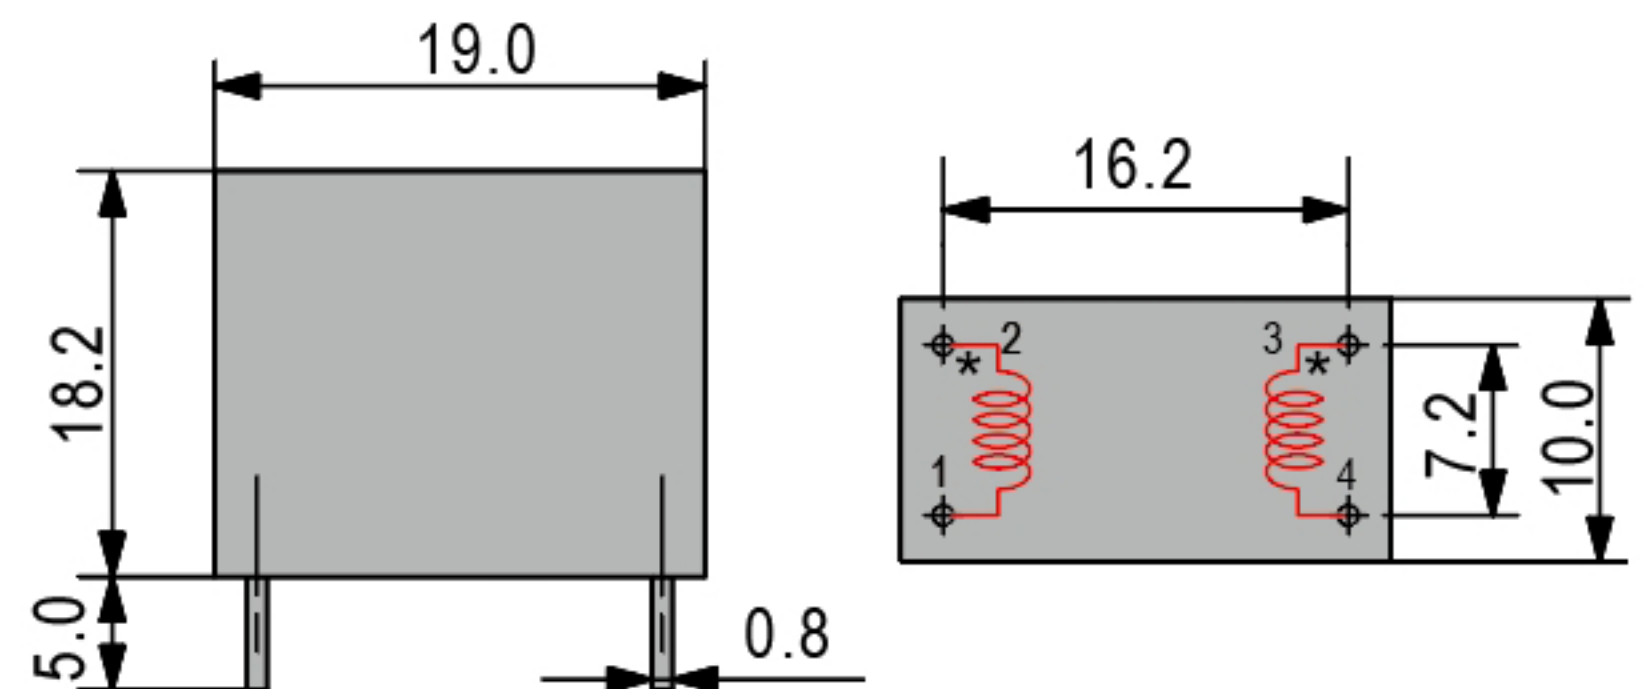
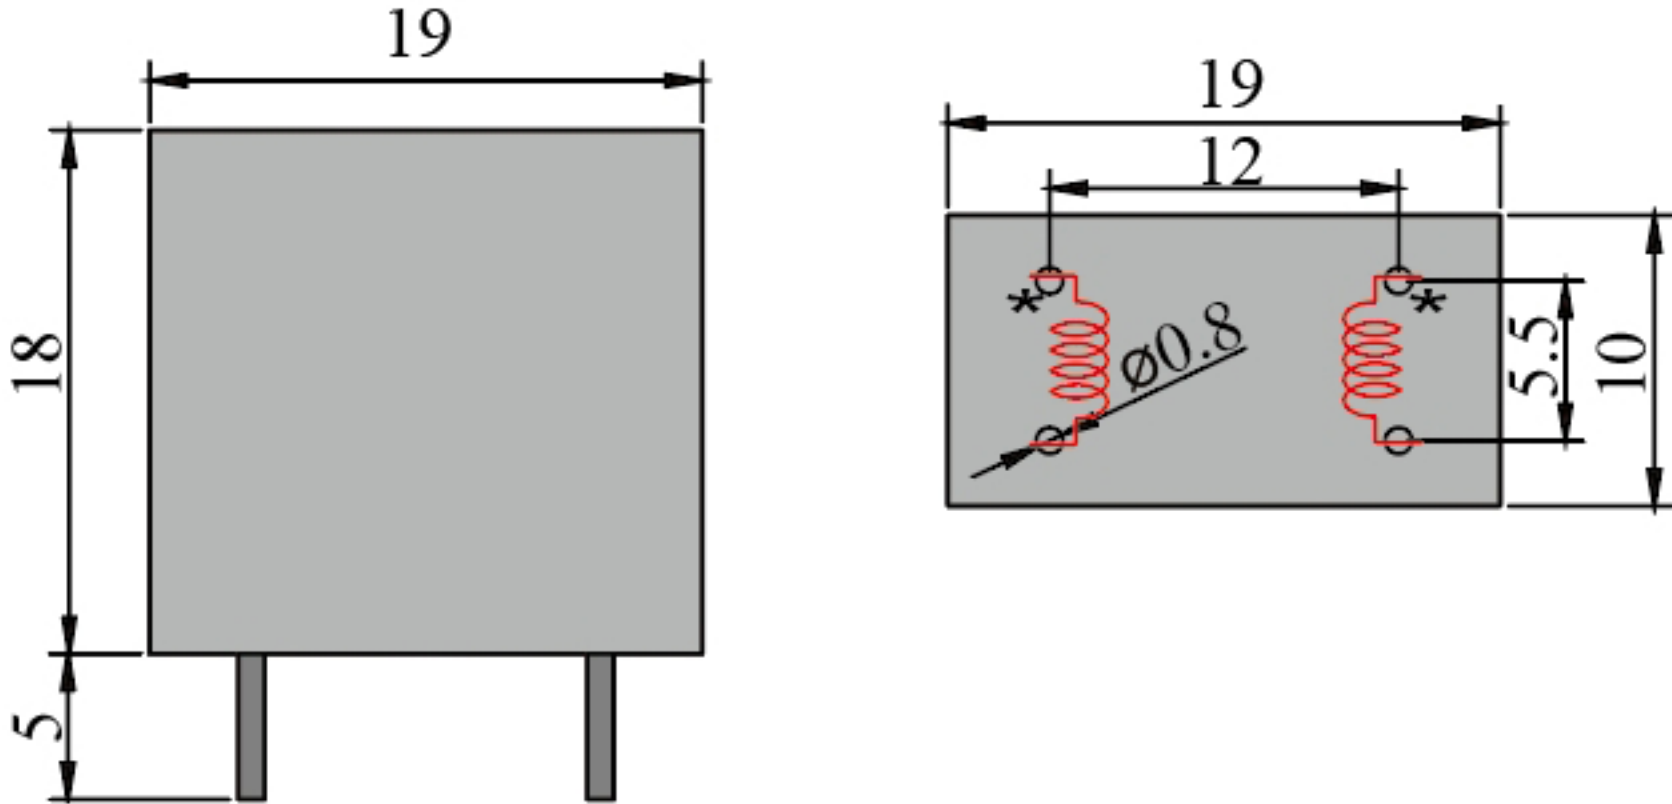
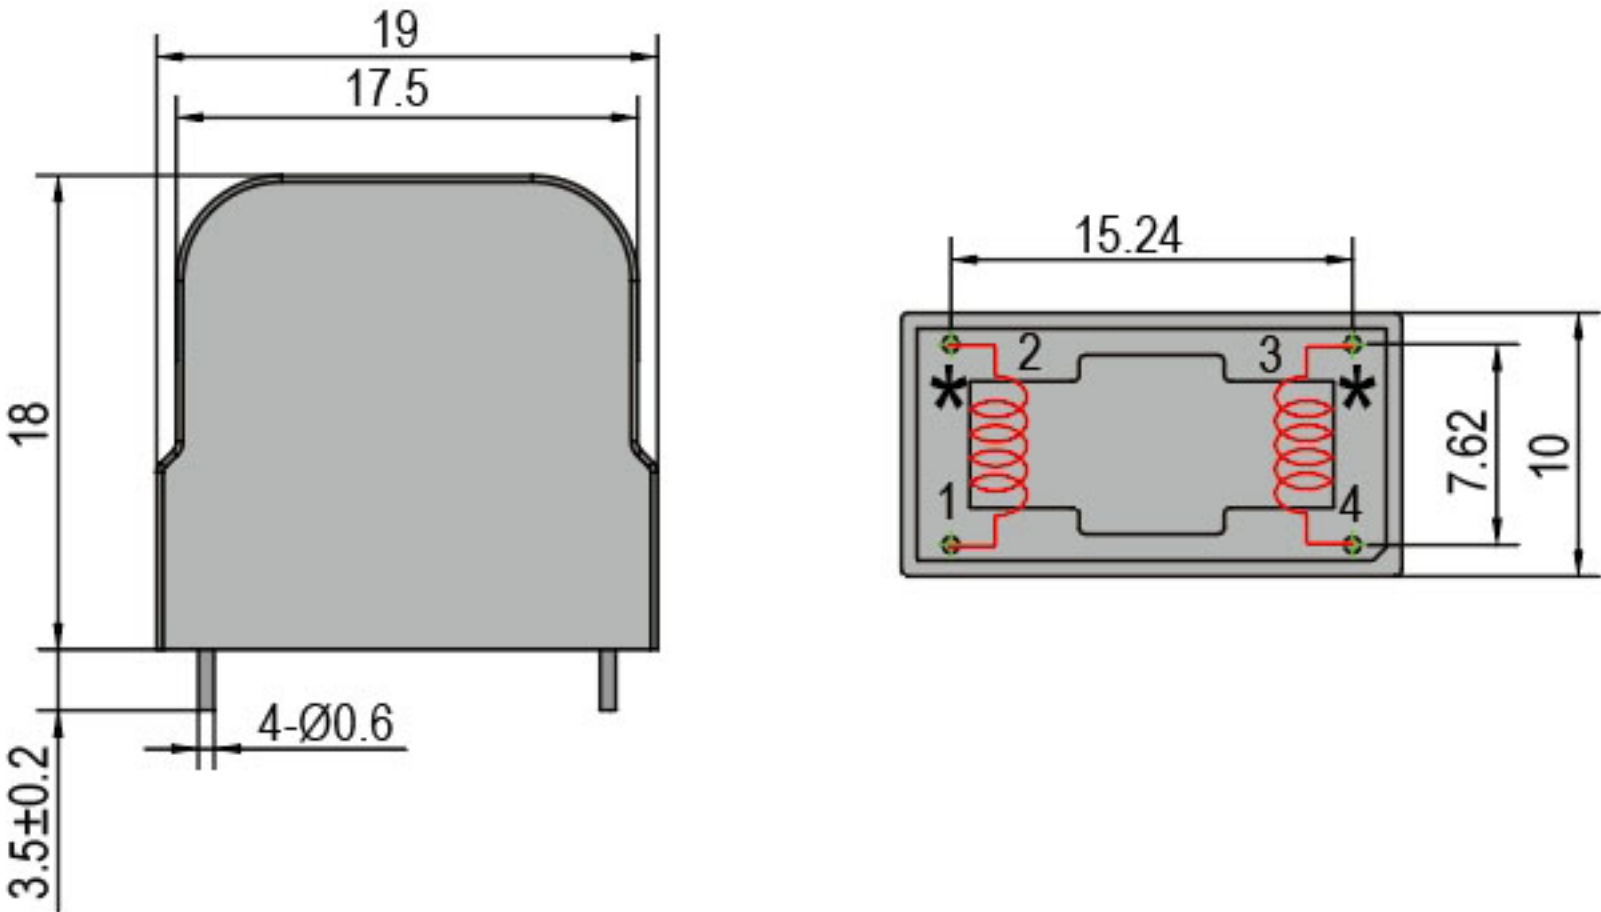



产品型号	PT232161	
额定输入	1mA	2mA
额定输出	1mA	2mA
推荐负载	$\leq 200\Omega$	$\leq 200\Omega$
精度等级	0.1 / 0.2 (仅限比差)	
外形尺寸	 The technical drawing illustrates the physical dimensions of the PT232161 sensor. The front view (left) shows a rectangular component with a width of 19.5 and a height of 18.2. It features two mounting pins at the bottom, with a pin diameter of 0.8 and a base thickness of 4.0. The top view (right) shows the same component from above, with a width of 19.5 and a height of 12.8. The internal layout includes a central square area with a width of 14.0. Four terminals are labeled 1, 2, 3, and 4, with terminals 2 and 3 marked with an asterisk (*). The distance between the terminals is 18.0.	


产品型号	PT232361	
额定输入	1mA	2mA
额定输出	1mA	2mA
推荐负载	$\leq 200\Omega$	$\leq 500\Omega$
精度等级	0.1 / 0.2 (仅限比差)	
外形尺寸	 The technical drawing illustrates the physical dimensions of the PT232361 sensor. The front view (left) shows a square component with a width of 19.5 and a height of 18.9. Two mounting pins are located at the bottom, with a distance of 5 between their centers. The top view (right) shows the same component from above, with a width of 19.5 and a height of 17. The internal layout includes two coils, each with four turns, connected to four terminals labeled 1, 2, 3, and 4. The distance between the centers of the two coils is 10. The distance from the top edge to the center of the left coil is 12.8. The diameter of the mounting holes is indicated as $\varnothing 0.8$. The terminals 1 and 2 are on the left, and 3 and 4 are on the right. The terminals 1 and 3 are marked with an asterisk (*).	

产品型号	PT232461	
额定输入	1mA	2mA
额定输出	1mA	2mA
推荐负载	$\leq 200\Omega$	$\leq 200\Omega$
精度等级	0.1 / 0.2 (仅限比差)	
外形尺寸	 The technical drawing illustrates the physical dimensions of the PT232461 sensor. The front view (left) shows a rectangular component with a width of 19.0 and a height of 18.2. It features two mounting pins at the base, each with a diameter of 0.8 and a height of 5.0. The side view (right) shows the component's profile with a width of 16.2, a total height of 10.0, and a mounting pin height of 7.2. Internal wiring is depicted in red, with terminals labeled 1, 2, 3, and 4, and a star symbol indicating a specific connection point.	

产品型号	PT232561	
额定输入	1 mA	2mA
额定输出	1 mA	2mA
推荐负载	$\leq 200\Omega$	$\leq 200\Omega$
精度等级	0.1 / 0.2 (仅限比差)	
外形尺寸		

产品型号	PT232661	
额定输入	1 mA	2mA
额定输出	1 mA	2mA
推荐负载	$\leq 200\Omega$	$\leq 200\Omega$
精度等级	0.1 / 0.2 (仅限比差)	
外形尺寸	 Technical drawing of the PT232661 sensor showing front and top views with dimensions. Front View Dimensions: - Overall width: 19 - Internal width: 17.5 - Overall height: 18 - Bottom mounting holes: 4-$\varnothing 0.6$ - Bottom flange thickness: 3.5 ± 0.2 Top View Dimensions: - Overall length: 15.24 - Overall width: 10 - Internal width: 7.62 - Terminal positions: 1, 2, 3, 4 - Mounting holes: marked with asterisks (*)	

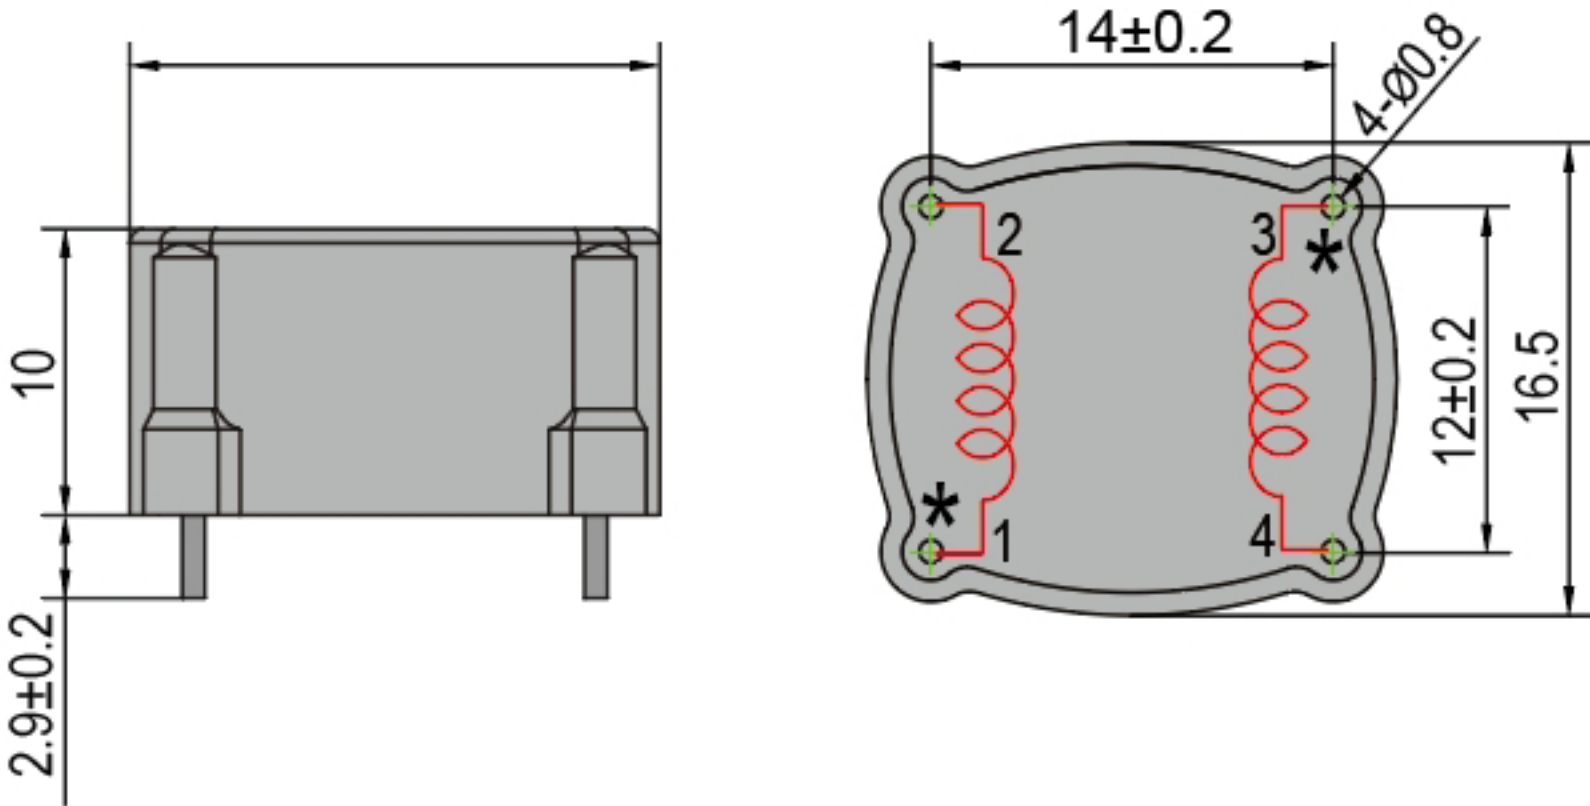产品型号	PT232861	
额定输入	1mA	2mA
额定输出	1mA	2mA
推荐负载	$\leq 200\Omega$	$\leq 500\Omega$
精度等级	0.1 / 0.2 (仅限比差)	
外形尺寸	 The technical drawing consists of two views of the PT232861 sensor. The left view is a side profile showing a rectangular body with two mounting tabs on the sides. Dimensions include a total width of 10mm, a mounting tab width of 2.9±0.2mm, and a central body width of 14±0.2mm. The right view is a top-down perspective showing the sensor's footprint. It features two red coils labeled 1, 2, 3, and 4. Dimensions include a total width of 14±0.2mm, a total height of 16.5mm, a central coil area height of 12±0.2mm, and four mounting holes with a diameter of 4-Ø0.8mm. Asterisks (*) are placed near the coils.	

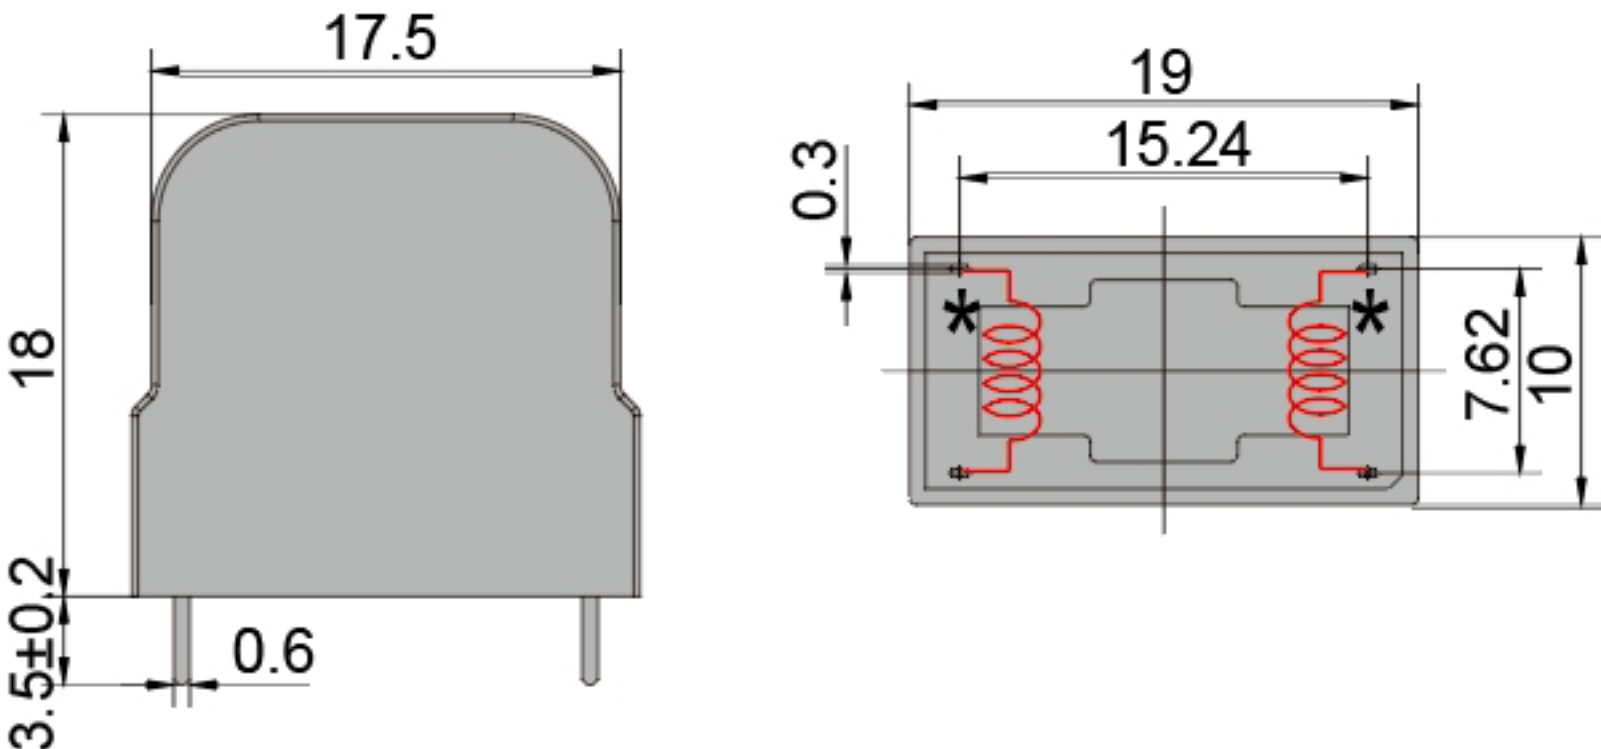产品型号	PT232961	
额定输入	1mA	2mA
额定输出	1mA	2mA
推荐负载	<200Ω	<200Ω
精度等级	0.1 / 0.2	0.1 / 0.2
外形尺寸	 The technical drawing consists of two views of the PT232961 sensor. The left view is a front elevation showing a rectangular component with rounded top corners. Its overall width is 17.5, overall height is 18, and the bottom section has a height of 3.5±0.2 and a width of 0.6. The right view is a top-down plan view showing the internal layout of the sensor. It is a rectangular package with overall dimensions of 19 by 10. The internal sensing area is 15.24 wide and 7.62 high. Two red spiral coils are visible, each marked with an asterisk (*). The thickness of the package is indicated as 0.3.	