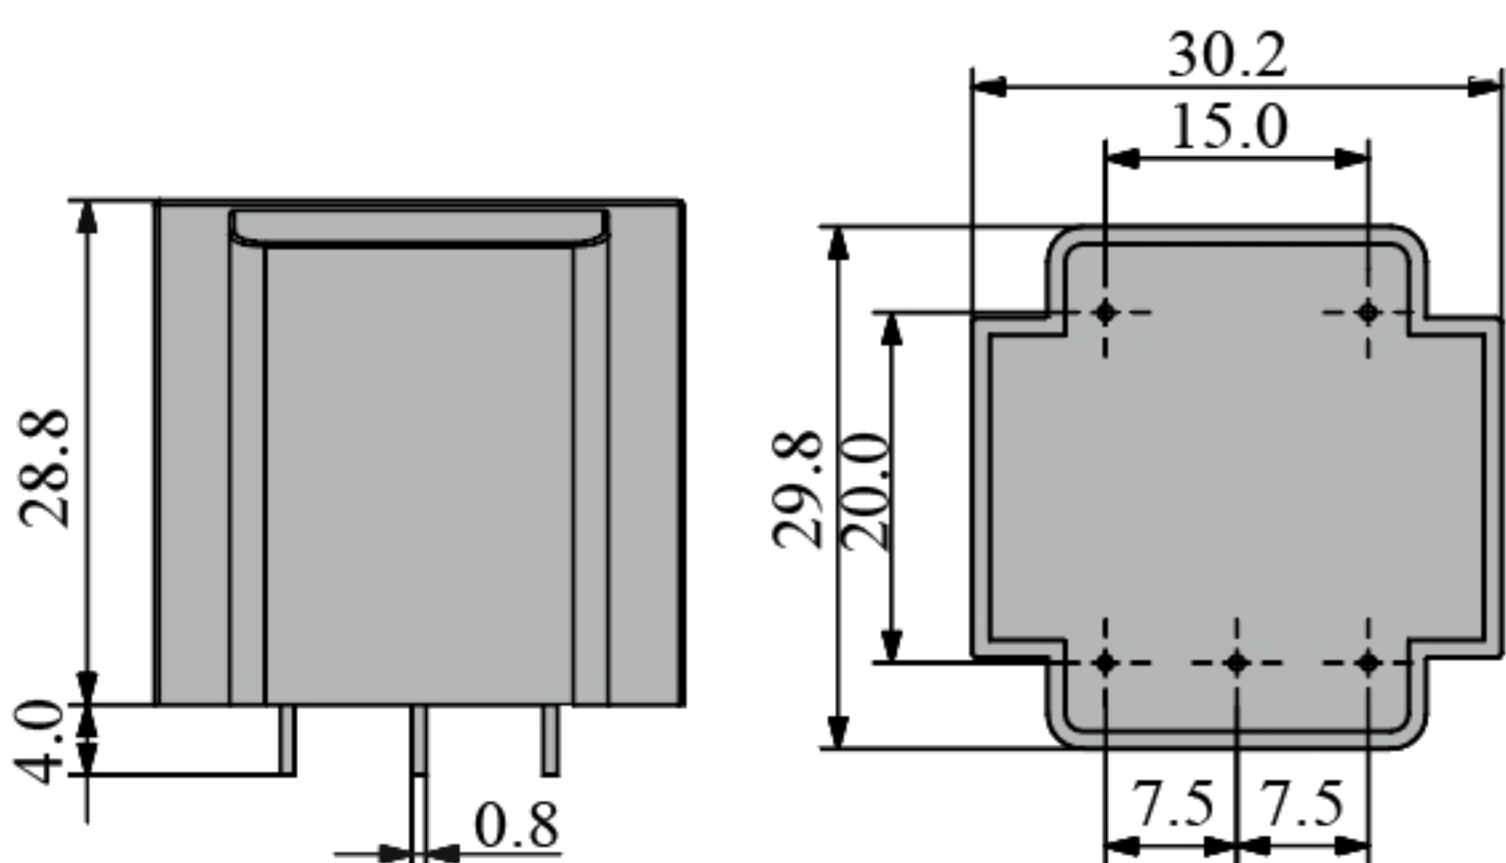
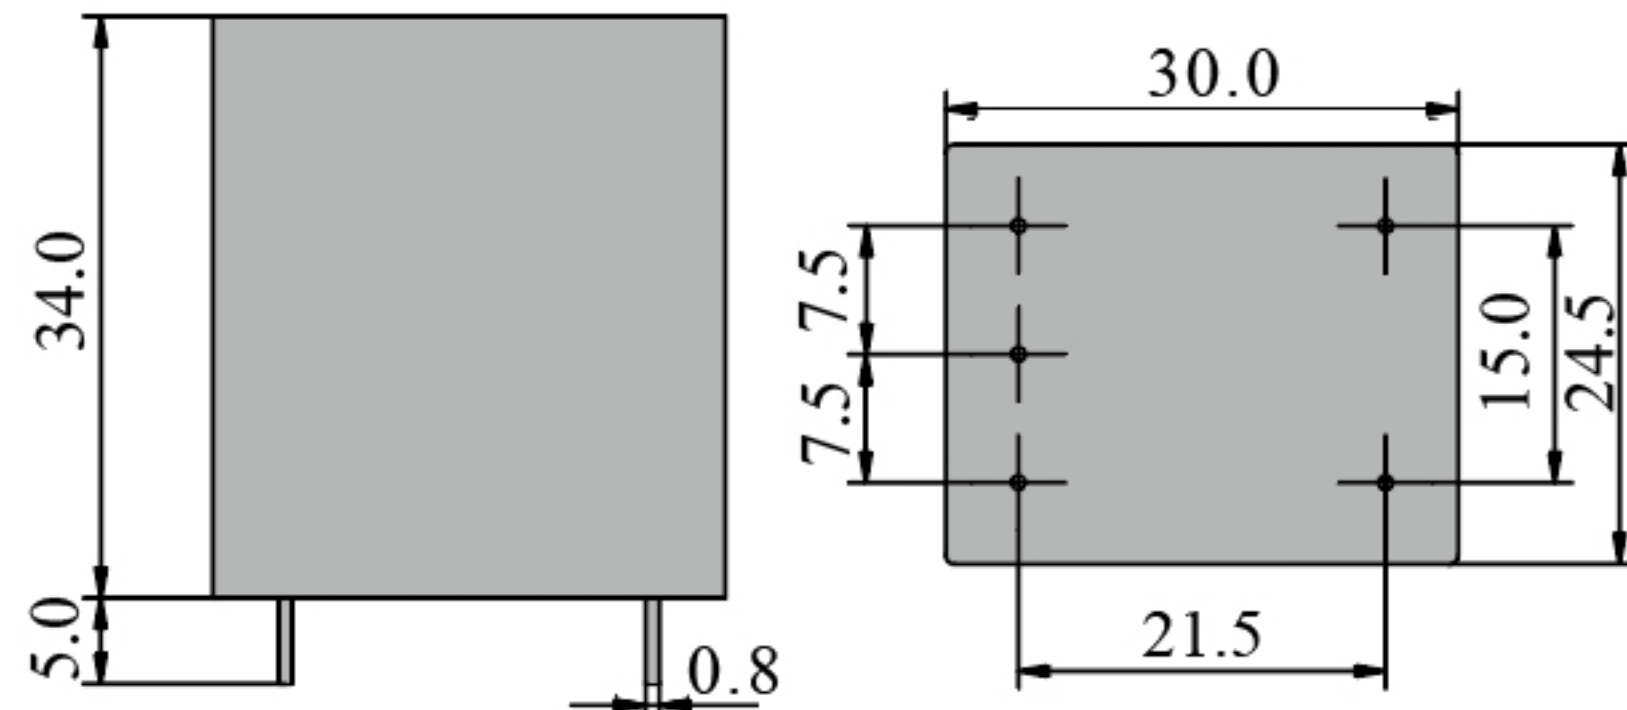
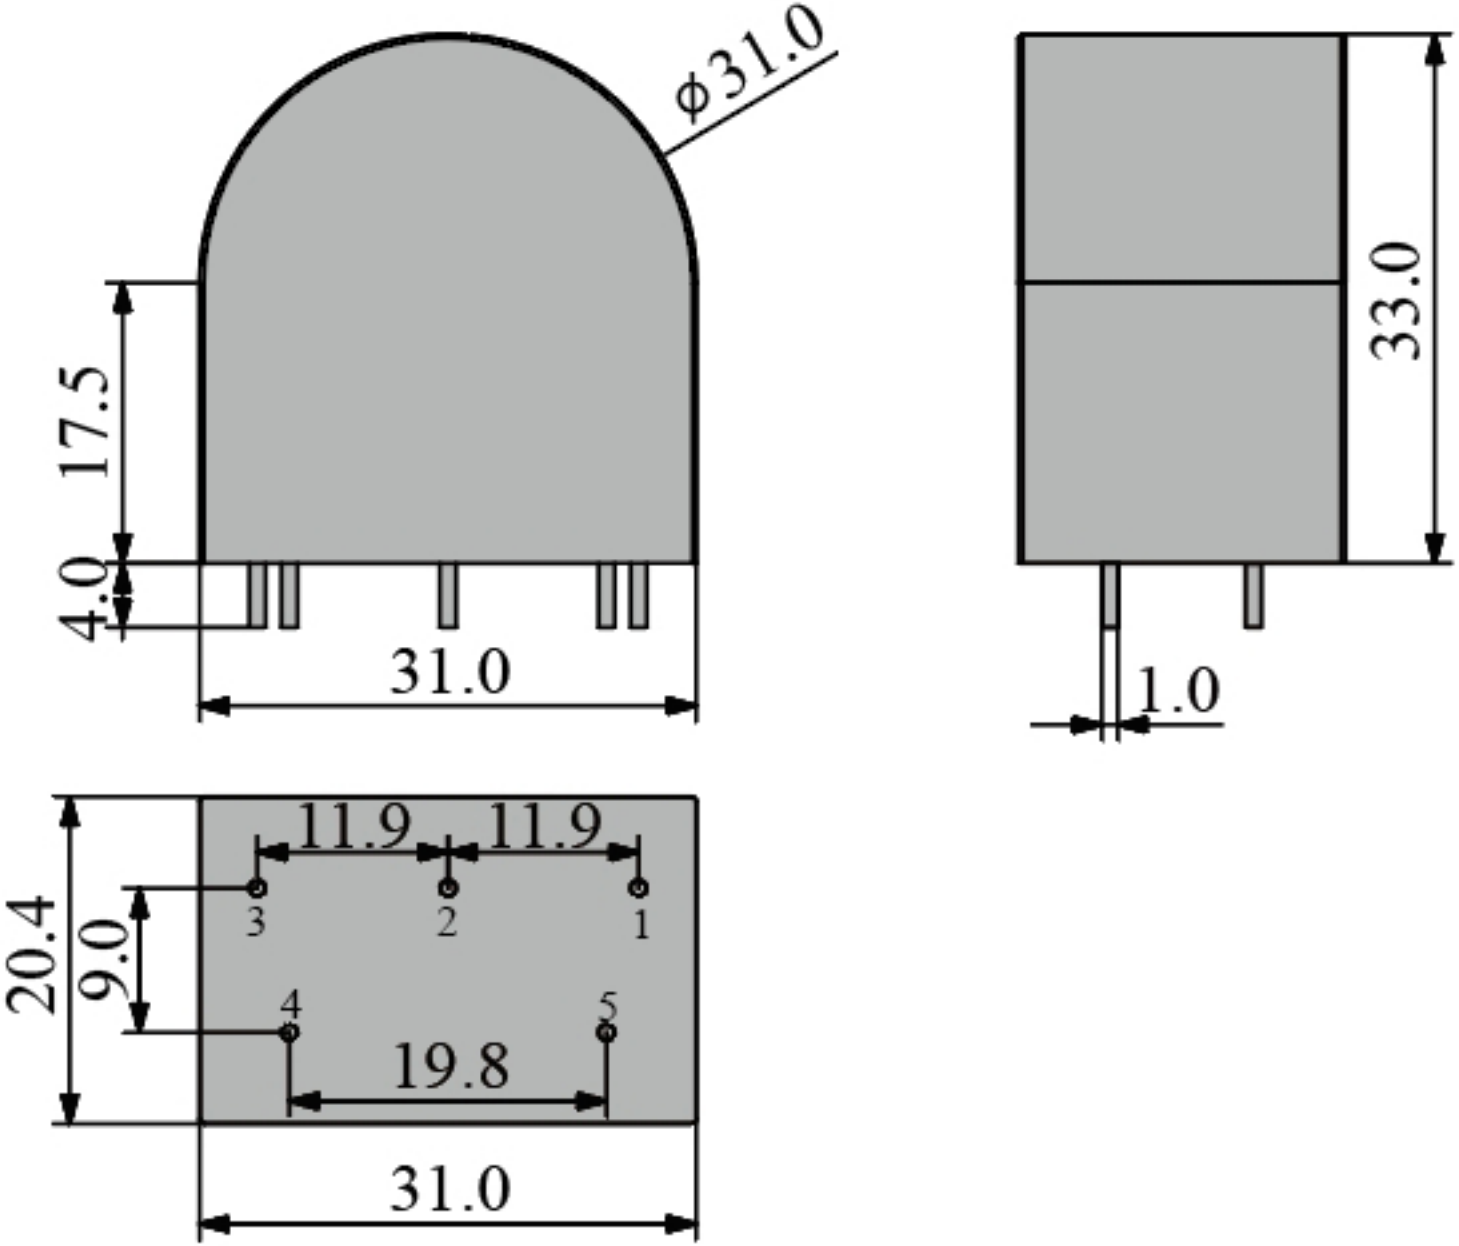
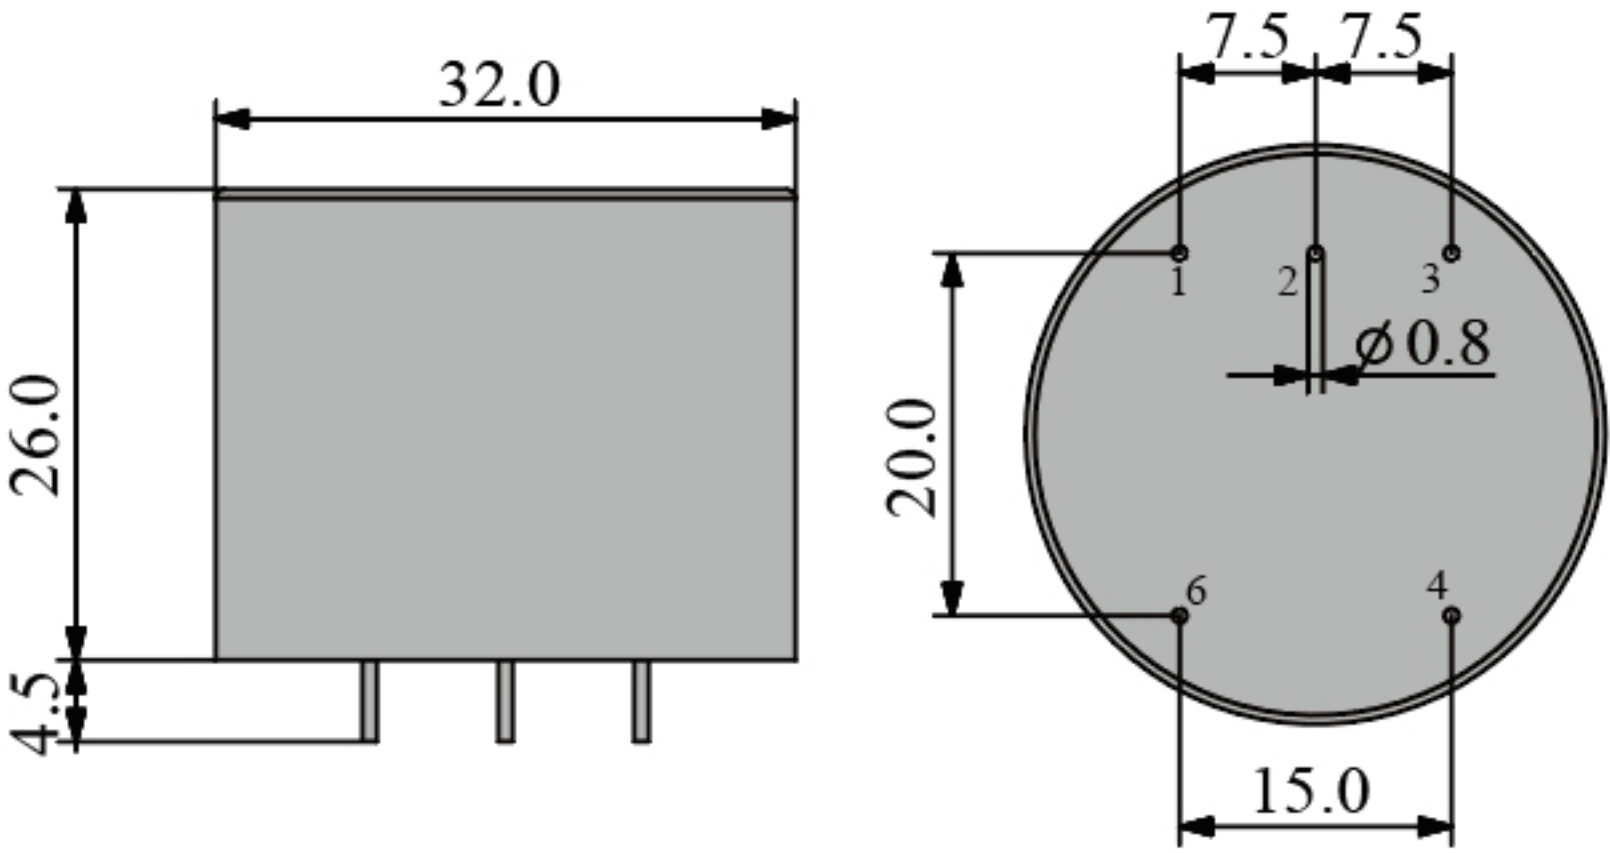
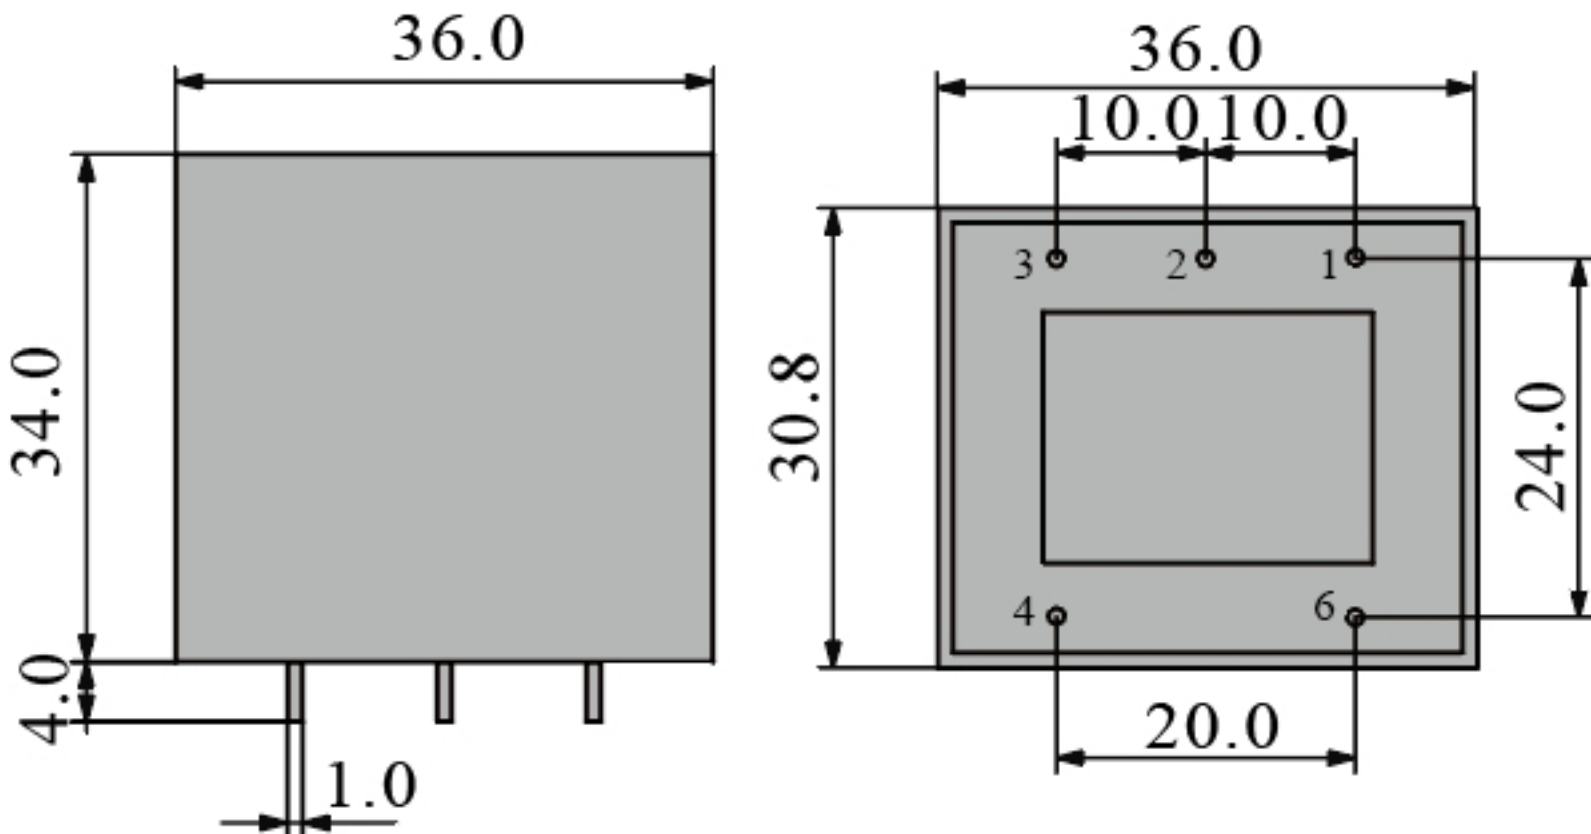



产品型号	PT291261/CT291261	
额定输入	0-120V	0-450 V
额定输出	7.07V	7.07V
推荐负载	-----	-----
精度等级	0.1 / 0.2	0.1 / 0.2
外形尺寸	 The technical drawing shows two views of the sensor. The front view (left) is a rectangular component with a height of 28.8 mm and a base width of 4.0 mm. The base has two mounting pins, each with a diameter of 0.8 mm. The top view (right) shows a square component with a side length of 30.2 mm. The central square area has a side length of 15.0 mm. The distance from the center to the bottom edge is 20.0 mm. The distance from the center to the side edges is 7.5 mm.	

产品型号	PT290661/CT290661	
额定输入	0-20A	0-250 V
额定输出	3.53V	3.53V
推荐负载	>100K	>100K
精度等级	0.1 / 0.2	0.1 / 0.2
外形尺寸	 The technical drawing shows two views of the module. The front view (left) is a rectangle with a height of 34.0 and a base width of 5.0. The top view (right) is a rectangle with a width of 30.0 and a depth of 24.5. The top view also shows a central rectangular area with a width of 21.5 and a depth of 15.0. There are four mounting holes, each with a diameter of 7.5, arranged in a 2x2 grid within the central area. The distance between the centers of the holes is 15.0 horizontally and 15.0 vertically. The distance from the top edge of the module to the center of the top holes is 7.5, and from the bottom edge to the center of the bottom holes is 7.5. The distance from the left edge to the center of the left holes is 7.5, and from the right edge to the center of the right holes is 7.5. The distance from the bottom edge to the top of the mounting holes is 5.0. The distance from the right edge to the left of the mounting holes is 0.8.	

产品型号	PT290791/CT290791	
额定输入	0-100A	0-150 V
额定输出	3.53V	3.53V
推荐负载	-----	-----
精度等级	0.1 / 0.2	0.1 / 0.2
外形尺寸		

产品型号	PT290861/CT290861	
额定输入	0-100A	0-220 V
额定输出	3.53V	3.53V
推荐负载	-----	-----
精度等级	0.1 / 0.2	0.1 / 0.2
外形尺寸	 The technical drawing illustrates the physical dimensions of the PT290861/CT290861 sensor. The front view (left) shows a rectangular component with a width of 32.0 and a height of 26.0. A base flange with a thickness of 4.5 is visible at the bottom. The top view (right) shows a circular footprint with an outer diameter of 20.0 and an inner circular feature with a diameter of 15.0. Six mounting holes are arranged in a circular pattern, with three holes on each side of the central feature. The distance between the centers of the two holes on each side is 7.5. The diameter of each hole is 0.8.	

产品型号	PT290961/CT290961	
额定输入	0-100A	0-450 V
额定输出	3.53V	3.53V
推荐负载	-----	-----
精度等级	0.1 / 0.2	0.1 / 0.2
外形尺寸	 The technical drawing consists of two views of a rectangular module. The front view (left) shows a rectangle with a width of 36.0 and a height of 34.0. Below the rectangle, there are three mounting pins. The distance from the bottom-left corner of the rectangle to the center of the first pin is 4.0. The distance between the centers of the first and second pins is 1.0. The top view (right) shows a square with a side length of 36.0. It features a central square with a side length of 20.0. Six mounting holes are arranged in a 2x3 grid. The horizontal distance between the first and second holes is 10.0, and between the second and third holes is 10.0. The vertical distance between the first and second holes is 10.0, and between the second and third holes is 10.0. The distance from the bottom-left corner of the outer square to the center of the first hole is 4.0. The distance from the bottom-left corner of the outer square to the center of the second hole is 20.0. The distance from the bottom-left corner of the outer square to the center of the third hole is 24.0.	

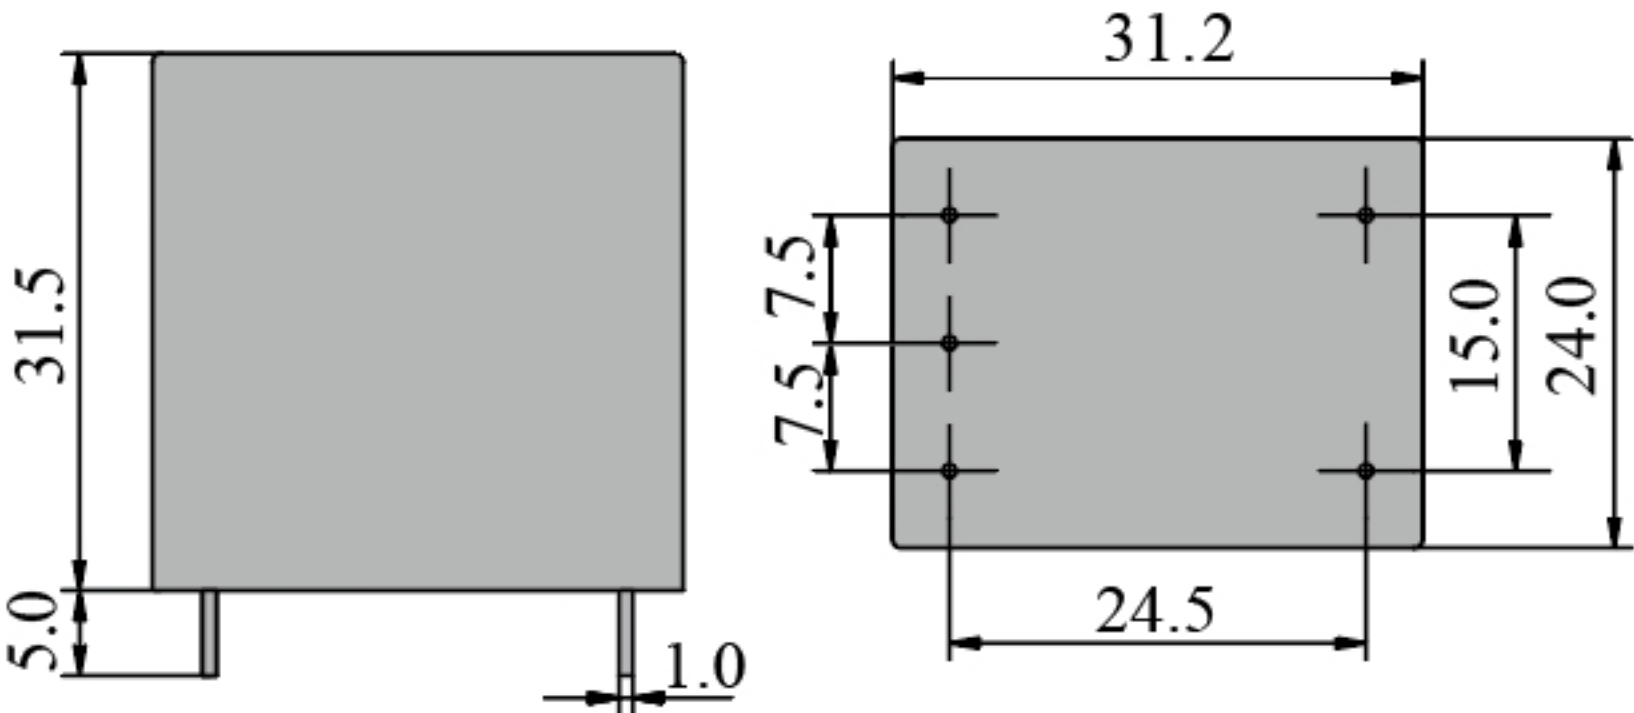产品型号	PT291001/CT291001	
额定输入	0-220V	0-450 V
额定输出	7.07V	7.07V
推荐负载	----	----
精度等级	0.1 / 0.2	0.1 / 0.2
外形尺寸	 The technical drawing shows two views of the module. The front view (left) is a rectangle with a height of 31.5 and a base with two mounting pins, each 5.0 high and 1.0 wide. The top view (right) shows a rectangle with a width of 31.2 and a depth of 24.5. The top view also shows four mounting holes arranged in a 2x2 grid, with a center-to-center distance of 7.5 between the holes. The distance from the top edge to the first row of holes is 7.5, and the distance from the bottom edge to the second row is 15.0. The distance from the left edge to the first column of holes is 7.5, and the distance from the right edge to the second column is 24.0.	