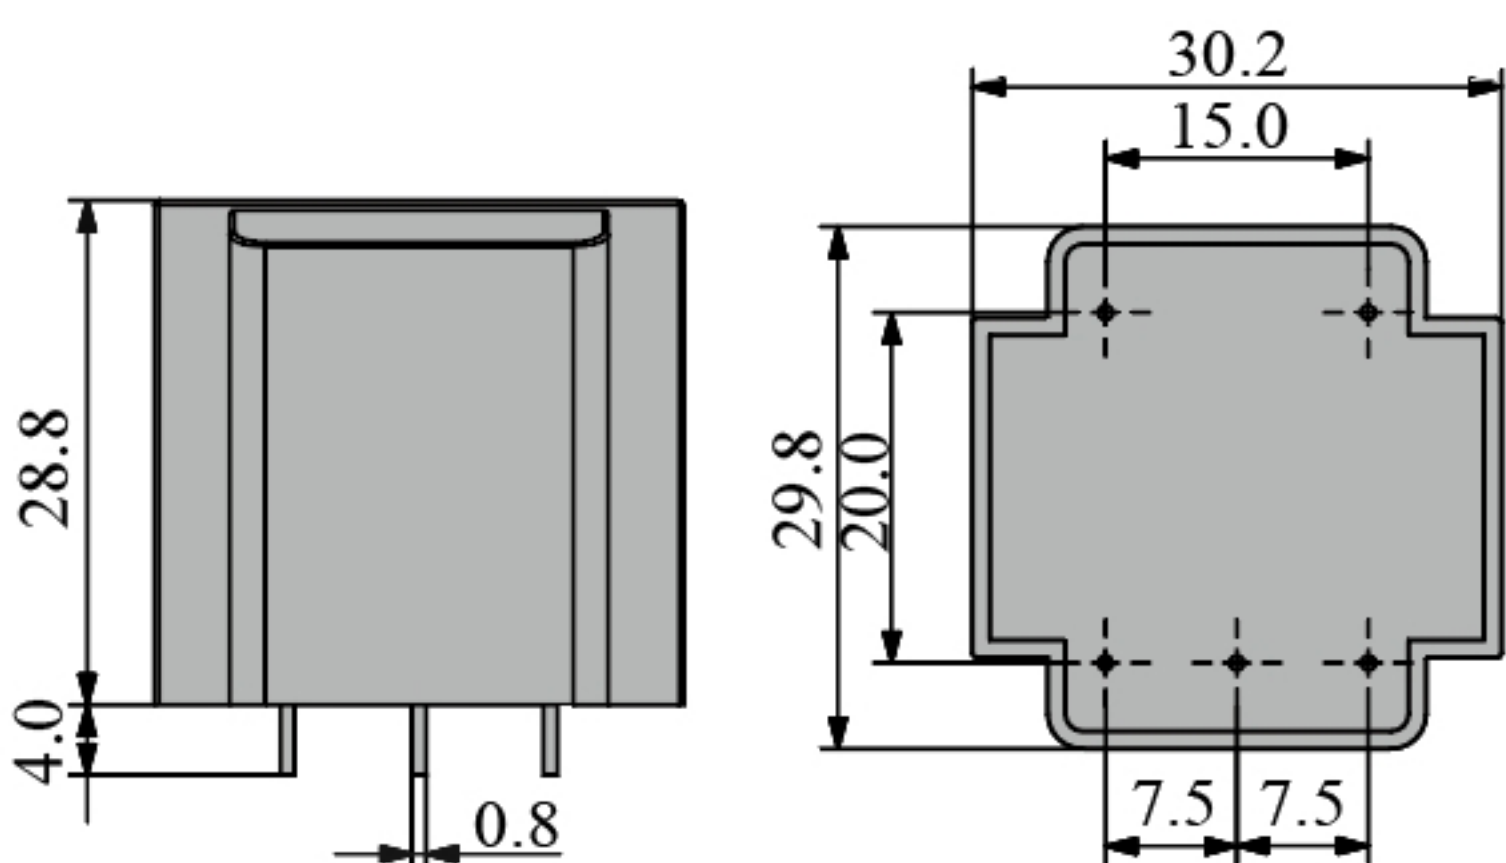
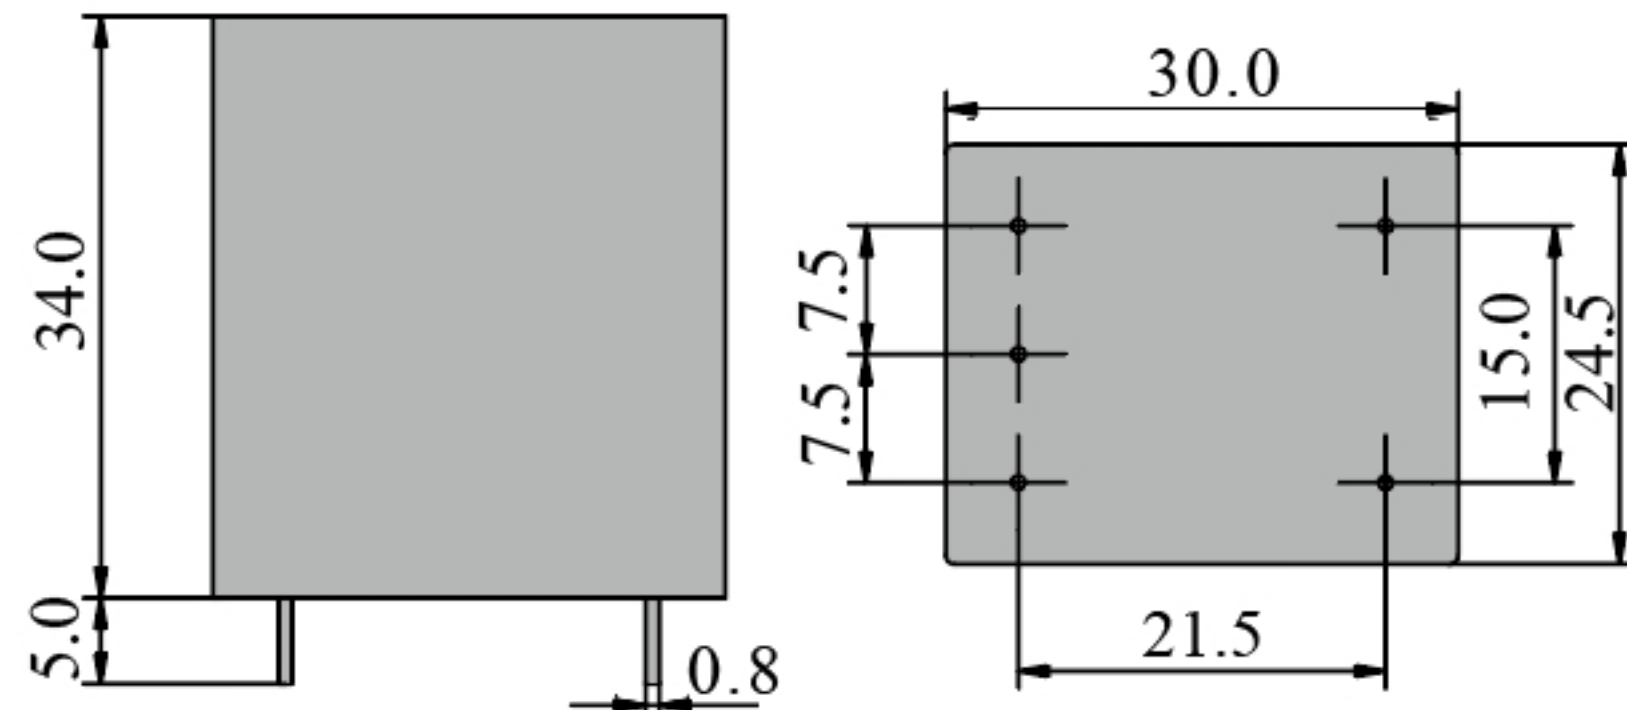
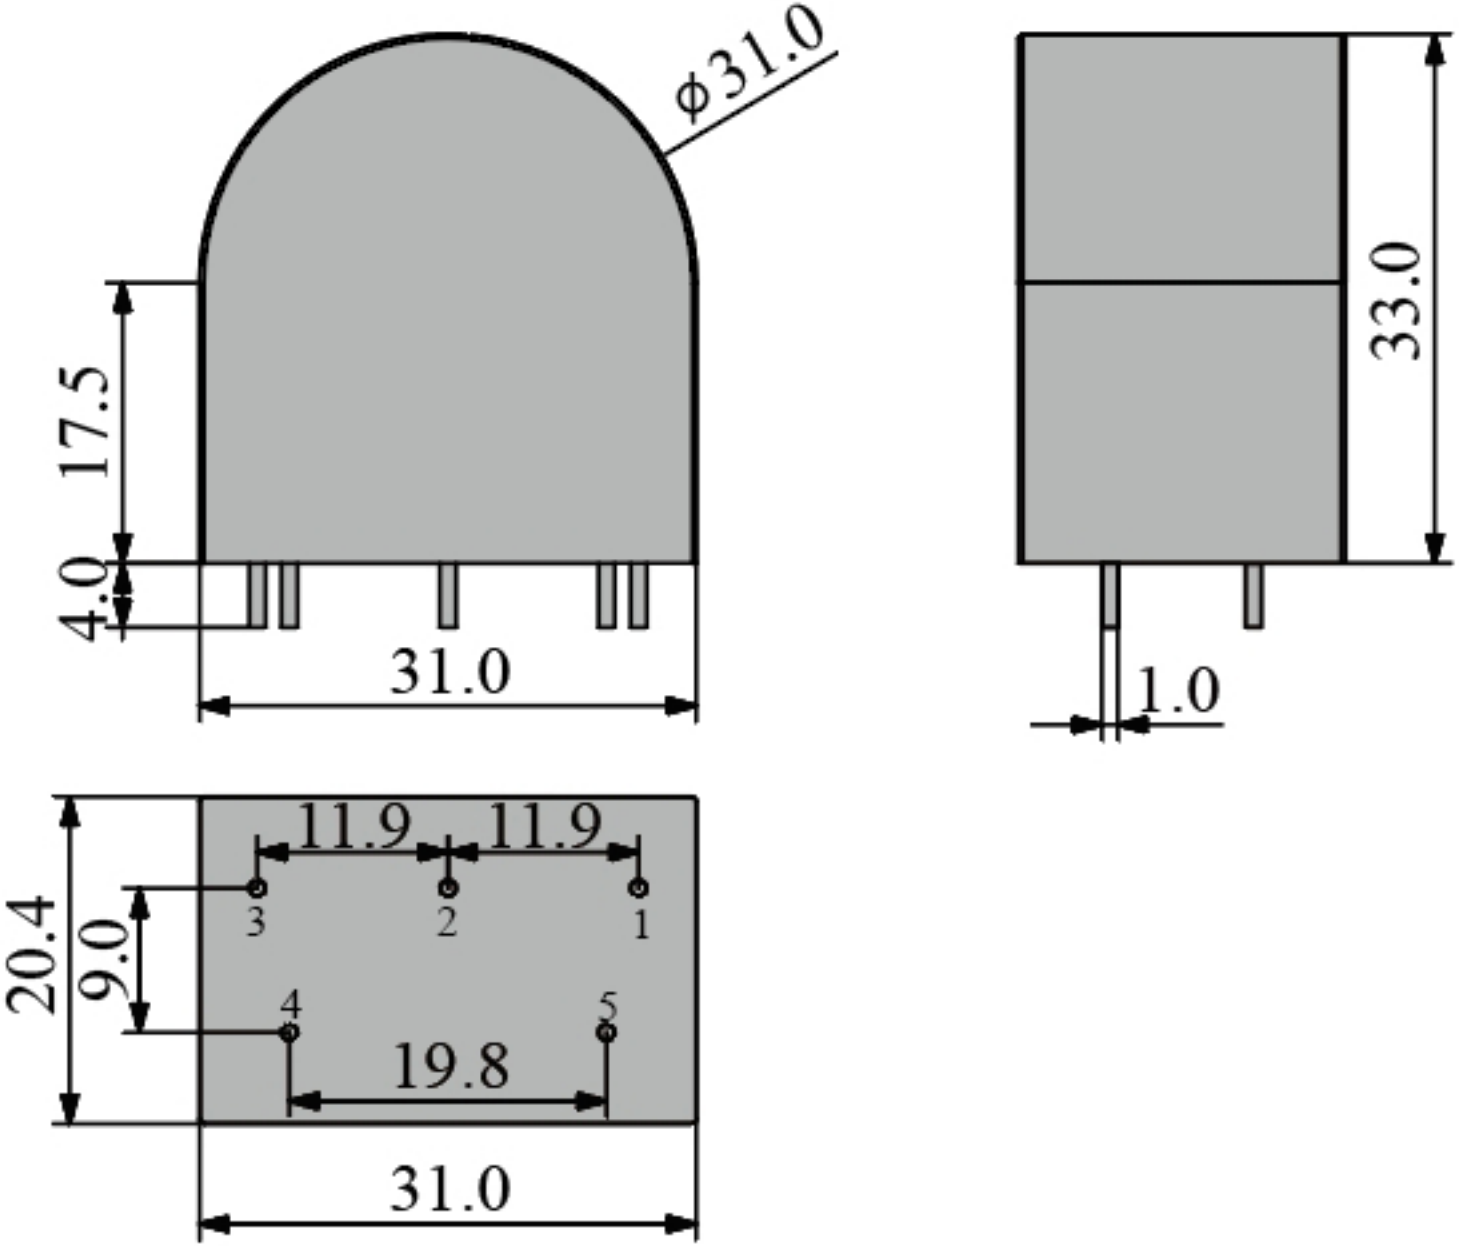
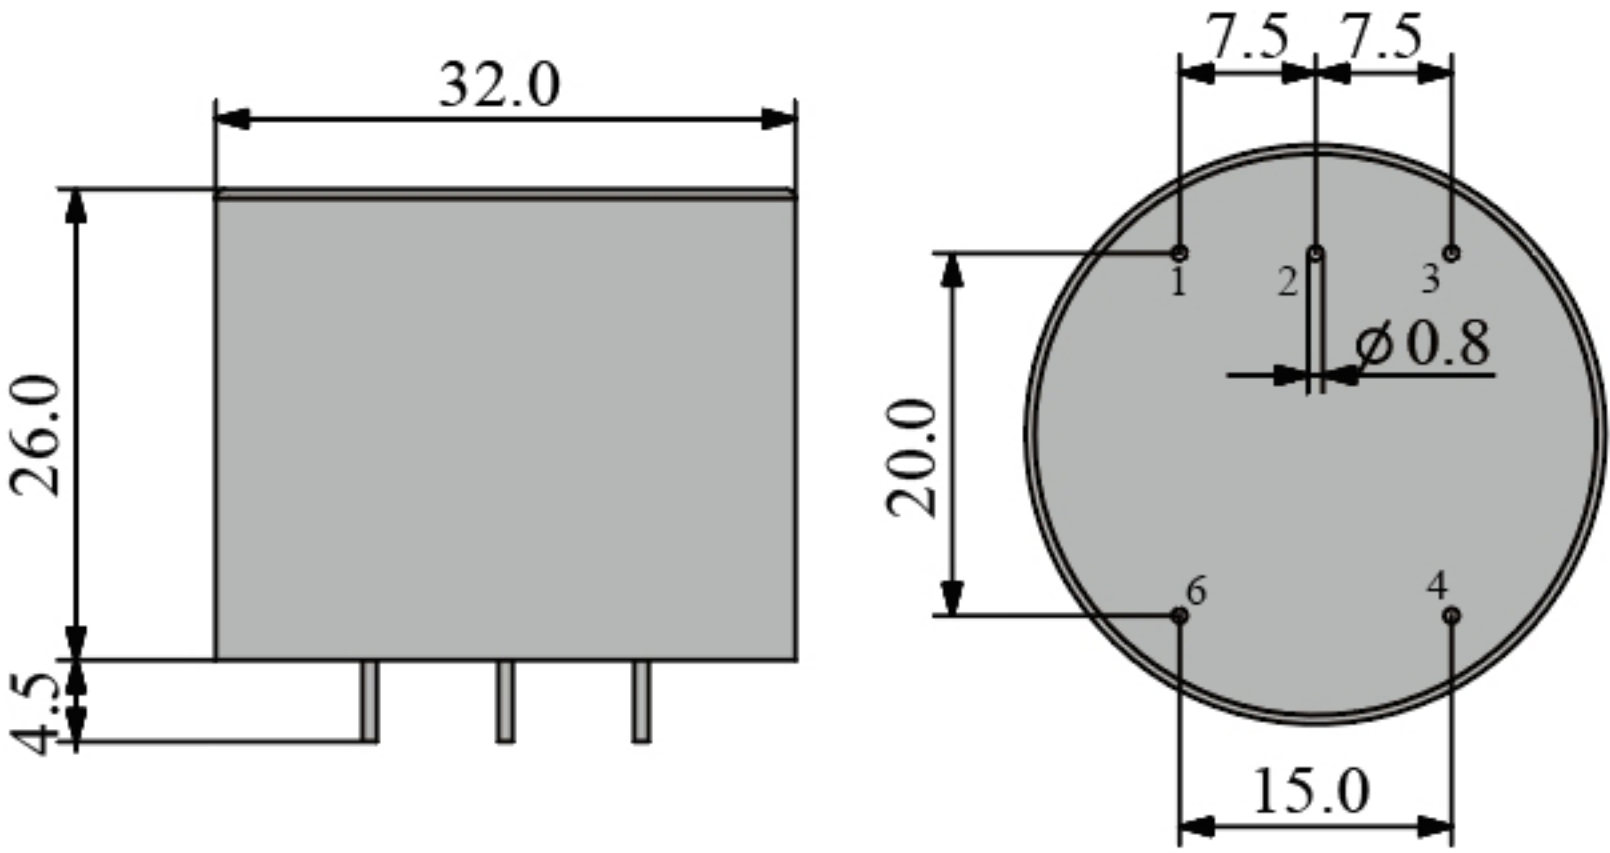
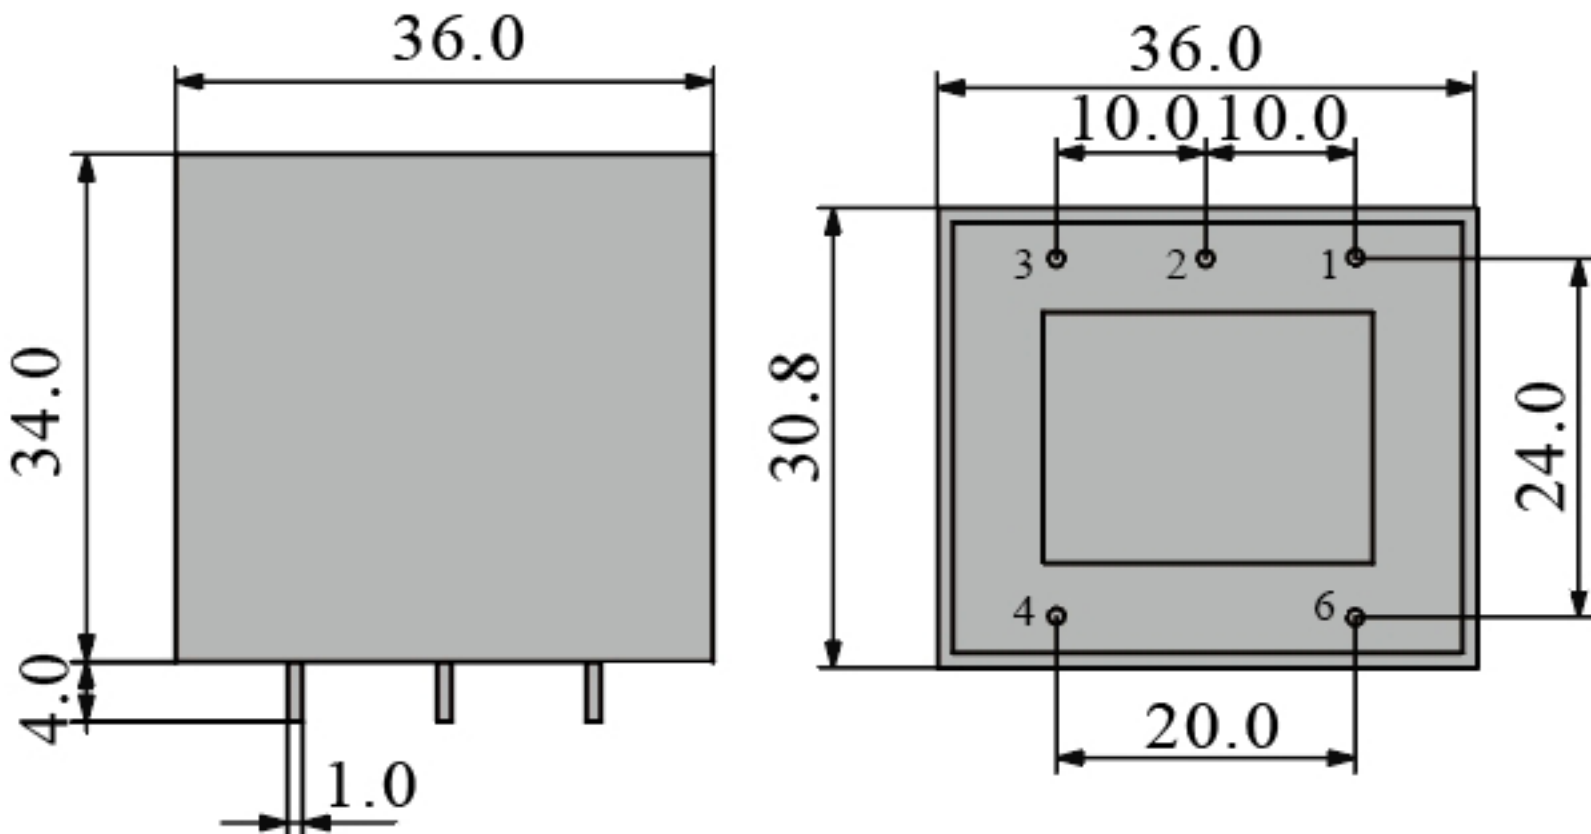



产品型号	PT291261/CT291261	
额定输入	0-120V	0-450 V
额定输出	7.07V	7.07V
推荐负载	-----	-----
精度等级	0.1 / 0.2	0.1 / 0.2
外形尺寸	 The technical drawing shows two views of the sensor. The front view (left) is a rectangular component with a height of 28.8 mm and a base width of 4.0 mm. The base has two mounting pins, each with a diameter of 0.8 mm. The top view (right) shows a square component with a side length of 30.2 mm. The central square area has a side length of 15.0 mm. The distance from the center to the bottom edge is 20.0 mm. The distance from the center to the side edge is 7.5 mm.	


产品型号	PT290661/CT290661	
额定输入	0-20A	0-250 V
额定输出	3.53V	3.53V
推荐负载	>100K	>100K
精度等级	0.1 / 0.2	0.1 / 0.2
外形尺寸	 The technical drawing shows two views of the module. The front view (left) is a rectangle with a height of 34.0 and a base width of 5.0. The top view (right) is a rectangle with a width of 30.0 and a depth of 24.5. The top view also shows a central rectangular area with a width of 21.5 and a depth of 15.0. There are four mounting holes, each with a diameter of 7.5, arranged in a 2x2 grid within the central area. The distance between the centers of the holes is 15.0 horizontally and 15.0 vertically. The distance from the top edge of the module to the center of the top holes is 7.5, and from the bottom edge to the center of the bottom holes is 7.5. The distance from the left edge to the center of the left holes is 7.5, and from the right edge to the center of the right holes is 7.5. The distance from the bottom edge to the top of the mounting holes is 5.0. The distance from the right edge to the left of the mounting holes is 0.8.	

产品型号	PT290791/CT290791	
额定输入	0-100A	0-150 V
额定输出	3.53V	3.53V
推荐负载	-----	-----
精度等级	0.1 / 0.2	0.1 / 0.2
外形尺寸	 The technical drawing illustrates the physical dimensions of the PT290791/CT290791 sensor in three views: Top View: Shows a semi-circular head with a diameter of $\phi 31.0$. The height from the base to the top of the head is 17.5. The base width is 31.0. The mounting pins are located 4.0 units from the base edge. Side View: Shows the rectangular body with a total height of 33.0 and a base width of 1.0. Bottom View: Shows the layout of five pins. The overall width is 31.0 and the height is 20.4. The pins are numbered 1 through 5. The horizontal distances between pins are 11.9 (between pins 3 and 2, and between pins 2 and 1) and 19.8 (between pins 4 and 5). The vertical distance between the top row of pins (3, 2, 1) and the bottom row (4, 5) is 9.0.	

产品型号	PT290861/CT290861	
额定输入	0-100A	0-220 V
额定输出	3.53V	3.53V
推荐负载	-----	-----
精度等级	0.1 / 0.2	0.1 / 0.2
外形尺寸		

产品型号	PT290961/CT290961	
额定输入	0-100A	0-450 V
额定输出	3.53V	3.53V
推荐负载	-----	-----
精度等级	0.1 / 0.2	0.1 / 0.2
外形尺寸	 The technical drawing consists of two views of a rectangular module. The front view (left) shows a rectangle with a width of 36.0 and a height of 34.0. Below the rectangle, there are three mounting pins. The distance from the bottom-left corner of the rectangle to the center of the first pin is 4.0. The distance between the centers of the first and second pins is 1.0. The top view (right) shows a rectangle with a width of 36.0 and a height of 30.8. Inside this rectangle is a smaller rectangle with a width of 20.0 and a height of 24.0. Six pins are located at the corners of the inner rectangle, numbered 1 through 6. The horizontal distances from the left and right edges of the inner rectangle to pins 3 and 1 respectively are 10.0. The vertical distances from the top and bottom edges of the inner rectangle to pins 1 and 4 respectively are 10.0.	

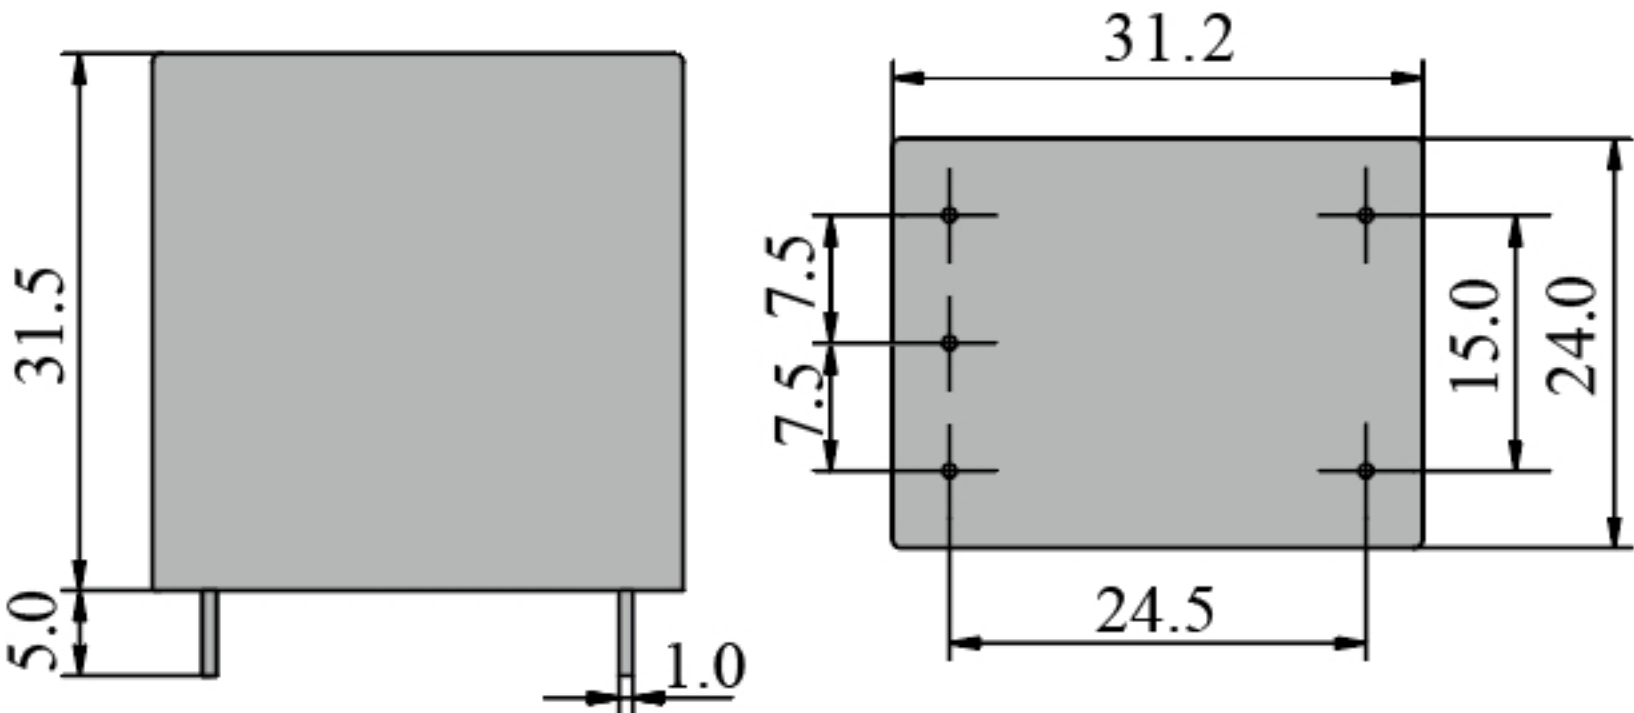产品型号	PT291001/CT291001	
额定输入	0-220V	0-450 V
额定输出	7.07V	7.07V
推荐负载	----	----
精度等级	0.1 / 0.2	0.1 / 0.2
外形尺寸	 The technical drawing shows two views of the module. The front view (left) is a rectangle with a height of 31.5 and a base with two mounting pins, each 5.0 high and 1.0 wide. The top view (right) shows a rectangle with a width of 31.2 and a depth of 24.5. It also shows a central area with a width of 24.5 and a depth of 15.0, with four mounting holes spaced 7.5 apart from the edges.	

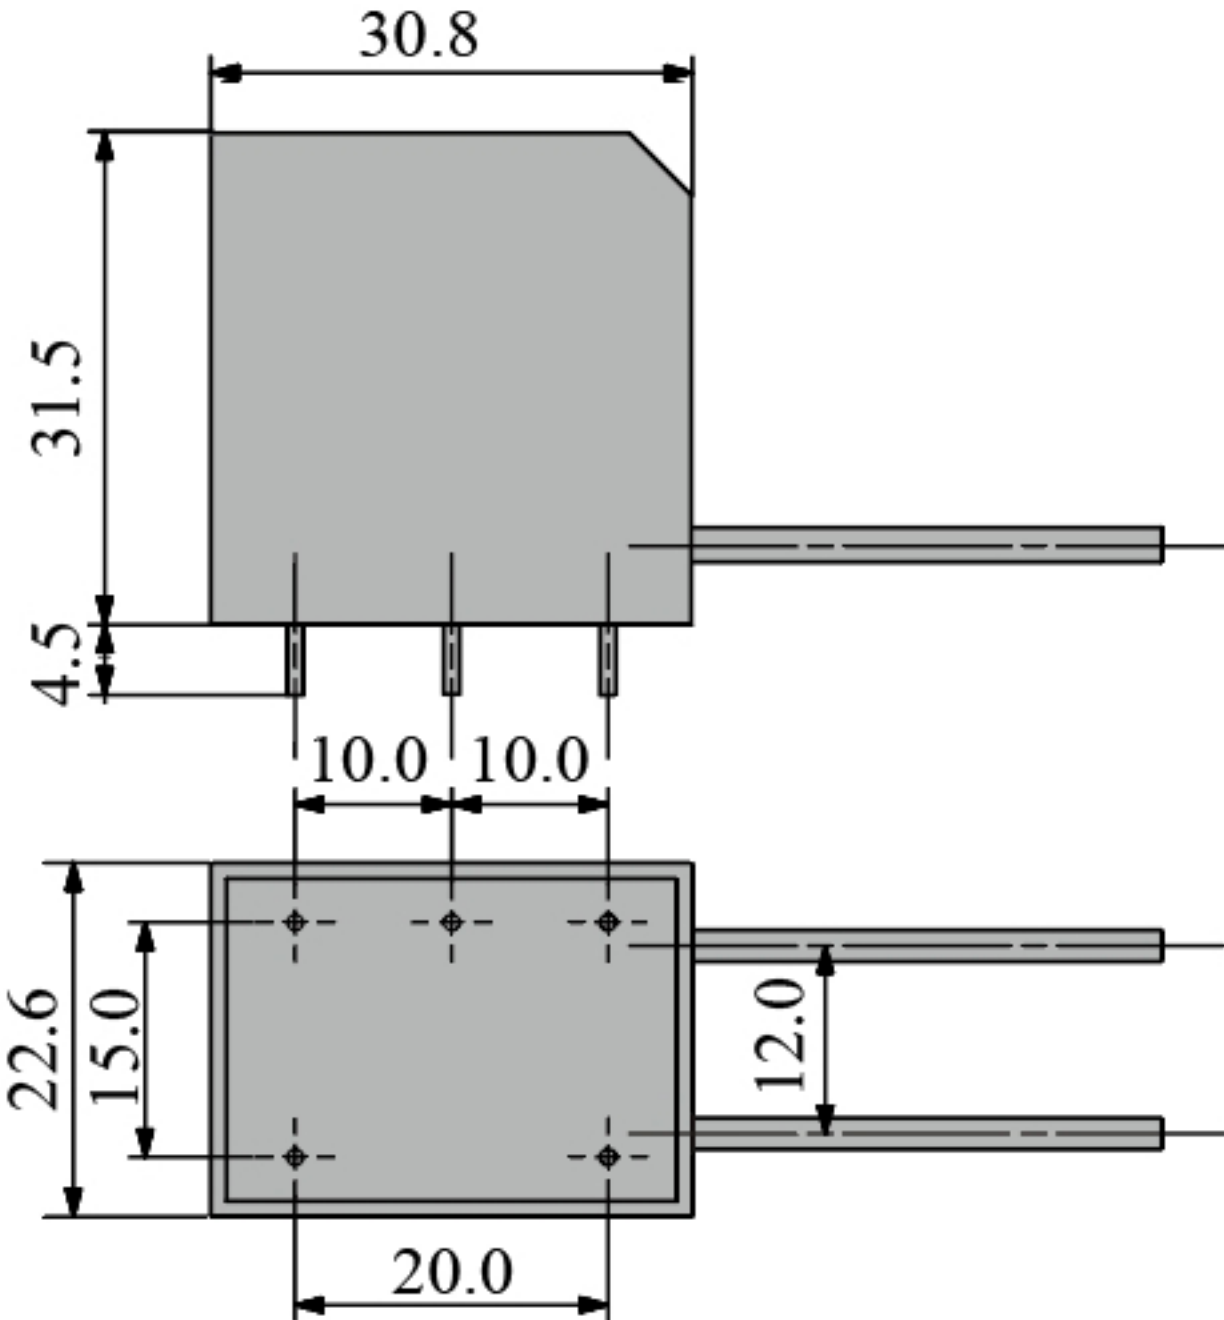产品型号	PT291161/CT291161	
额定输入	0-120V	0-220 V
额定输出	7.07V	0.303-7.07V
推荐负载	-----	-----
精度等级	0.1 / 0.2	0.1 / 0.2
外形尺寸	 Technical drawing of the PT291161/CT291161 module showing top and side views with dimensions: - Top View Dimensions: - Overall width: 30.8 - Overall height: 31.5 - Bottom flange width: 20.0 - Bottom flange height: 4.5 - Distance between mounting holes: 10.0 (center-to-center) - Distance from bottom edge to mounting holes: 15.0 - Side View Dimensions: - Height of main body: 12.0	