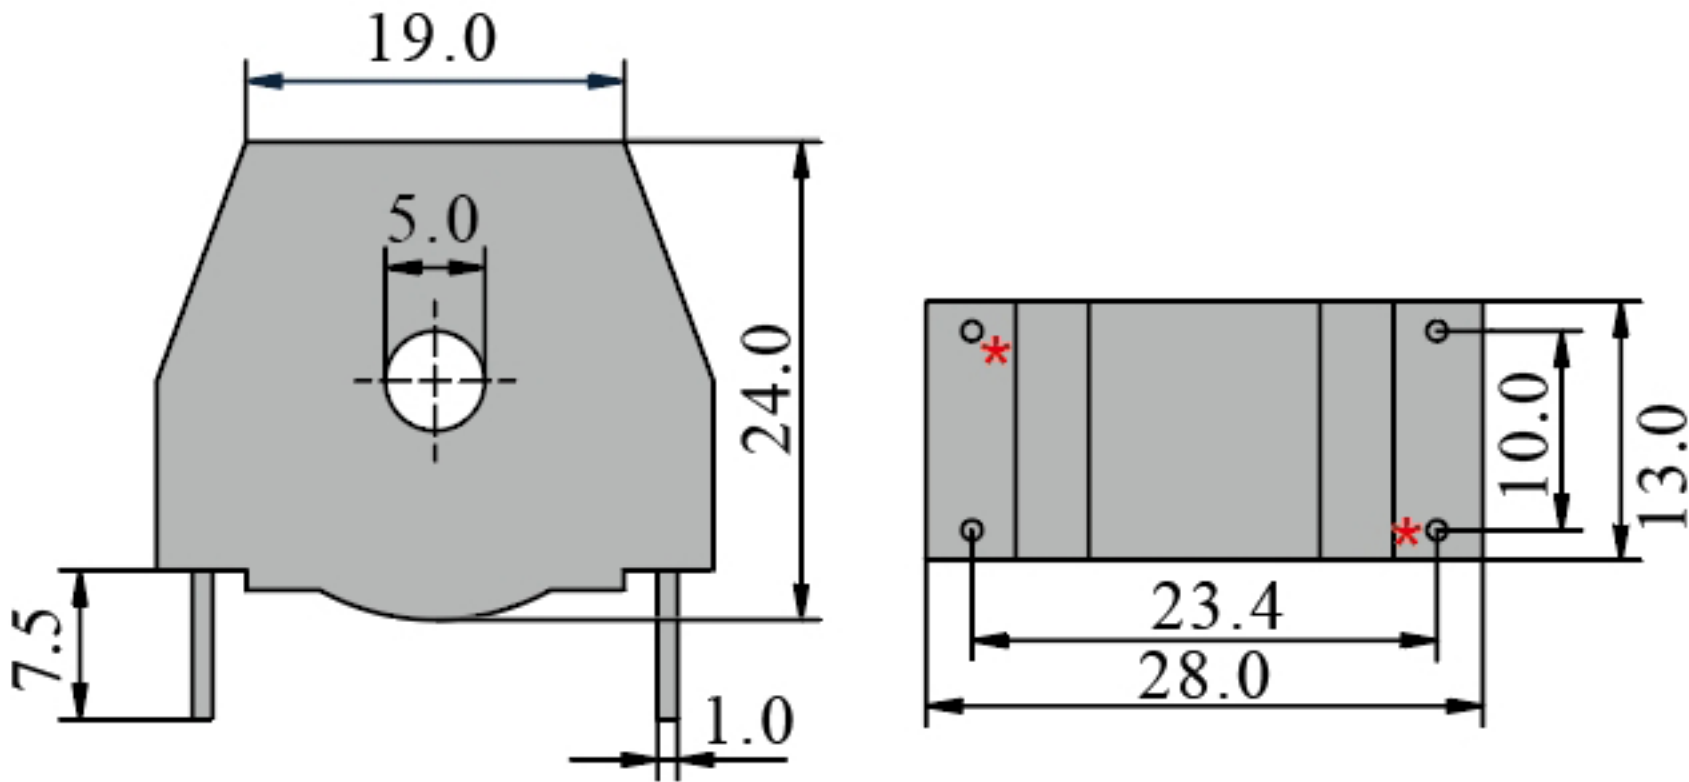
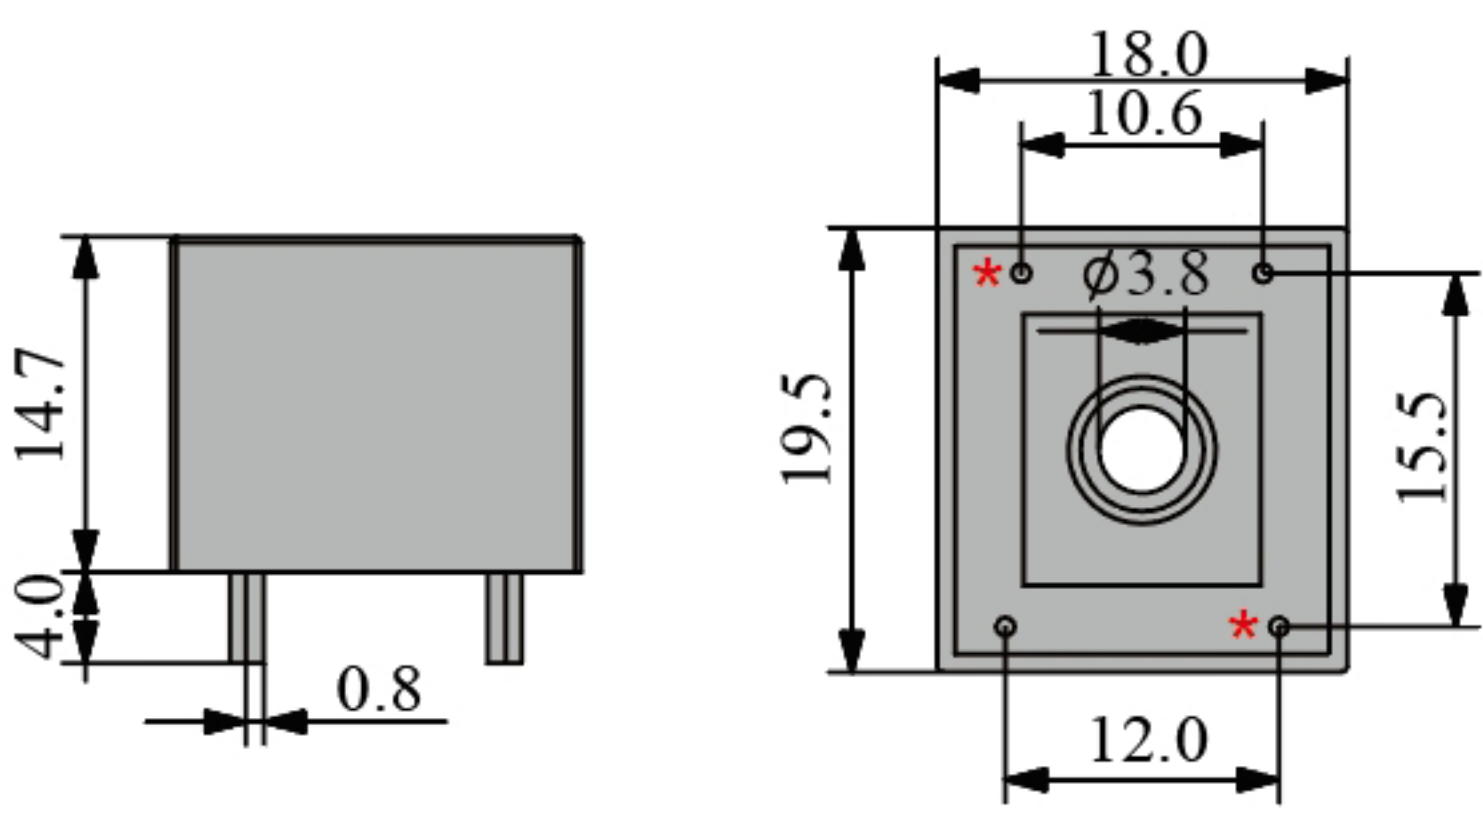


产品型号	PT223761/CT223761		
额定输入	10A	2mA	4mA
额定输出	5mA	2mA	4mA
推荐负载	200Ω	250Ω	200Ω
精度等级	0.1	0.2	0.2
外形尺寸	 The technical drawing illustrates the physical dimensions of the PT223761/CT223761 component. The top view (left) shows a trapezoidal shape with a top width of 19.0, a bottom width of 19.0, and a height of 24.0. A central circular feature has a diameter of 5.0. The side view (right) shows a rectangular profile with a total width of 28.0 and a total height of 13.0. The component has two mounting tabs, each 7.5 wide and 1.0 thick. The side view also indicates a central section width of 23.4 and a top section height of 10.0. Red asterisks mark specific features on the side view.		

产品型号	CT223361		
额定输入	5A	10A	2mA
额定输出	2.5mA	5mA	2mA
推荐负载	200Ω	100Ω	250Ω
精度等级	0.1 / 0.2	0.1 / 0.2	0.2
外形尺寸	 The technical drawing illustrates the physical dimensions of the CT223361 component. The left view is a side profile showing a main body height of 14.7 mm, a base thickness of 4.0 mm, and a mounting tab width of 0.8 mm. The right view is a top-down perspective of the square component, measuring 18.0 mm by 19.5 mm. It features a central circular feature with a diameter of 3.8 mm (labeled as $\phi 3.8$). The distance between the mounting holes is 10.6 mm, and the distance from the bottom edge to the mounting holes is 12.0 mm. The distance from the right edge to the mounting holes is 15.5 mm. Two red asterisks (*) mark the locations of the mounting holes.		