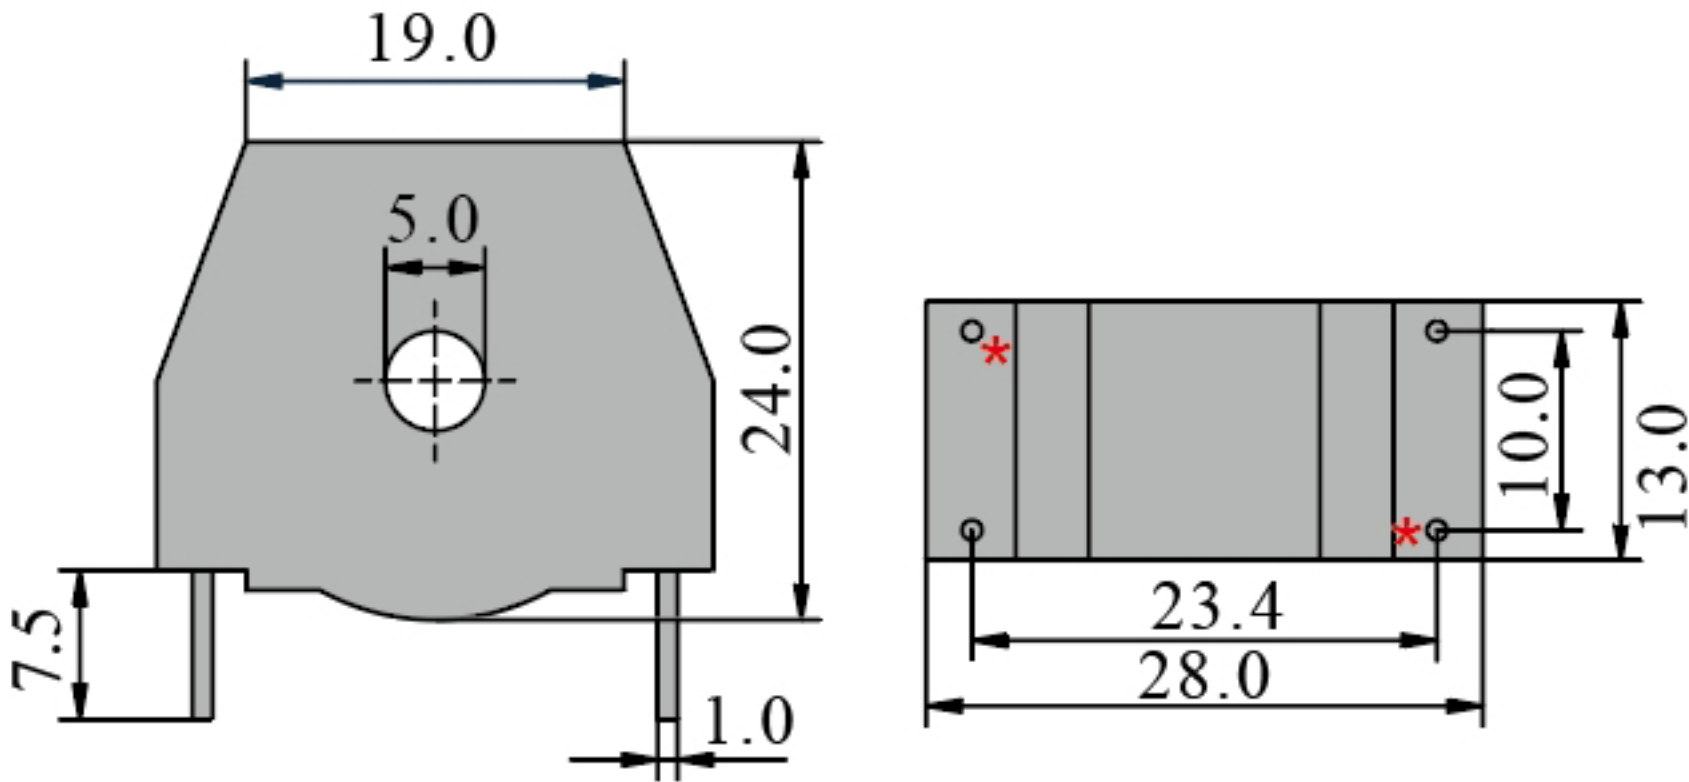
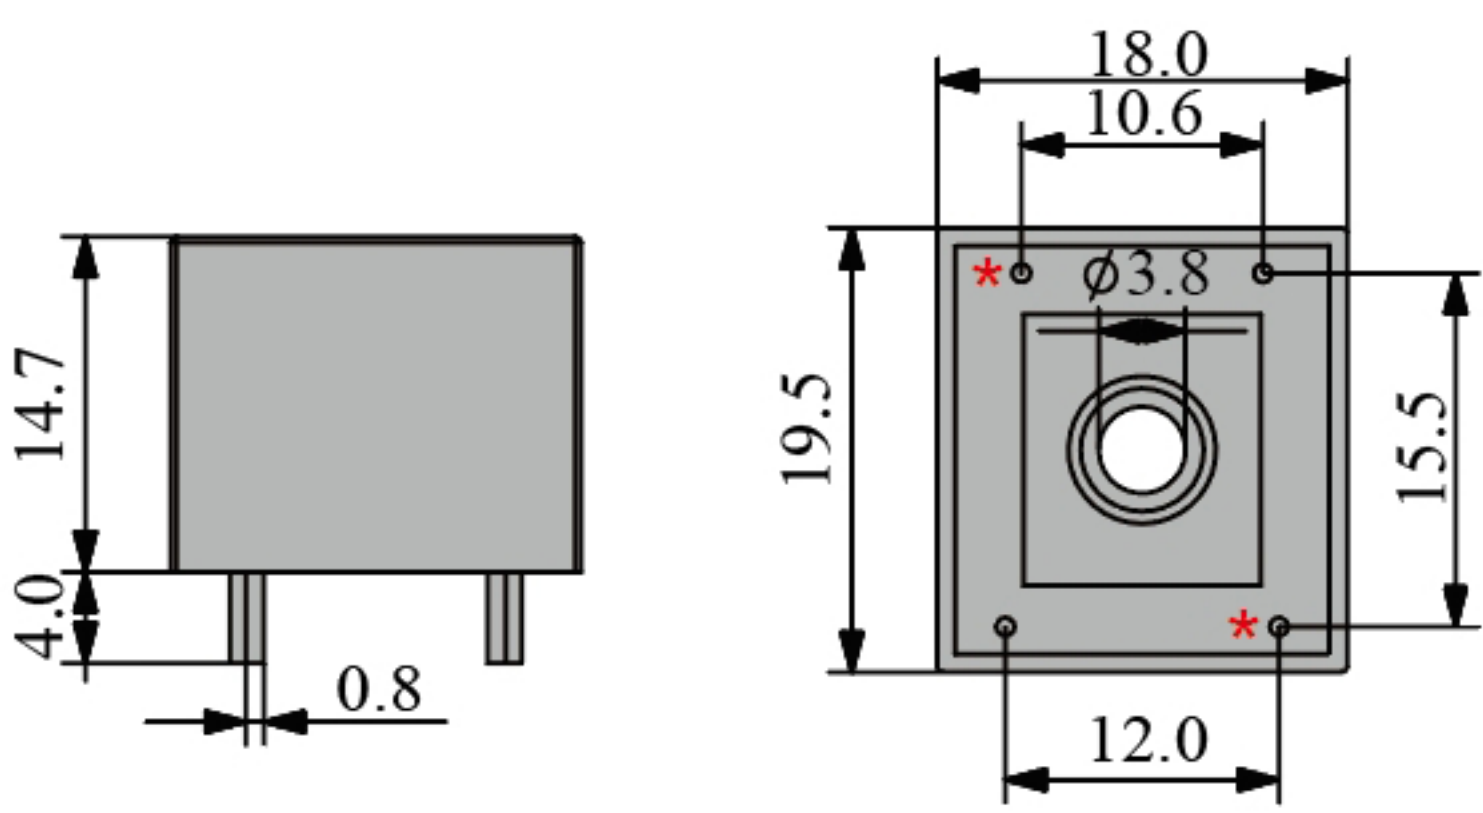
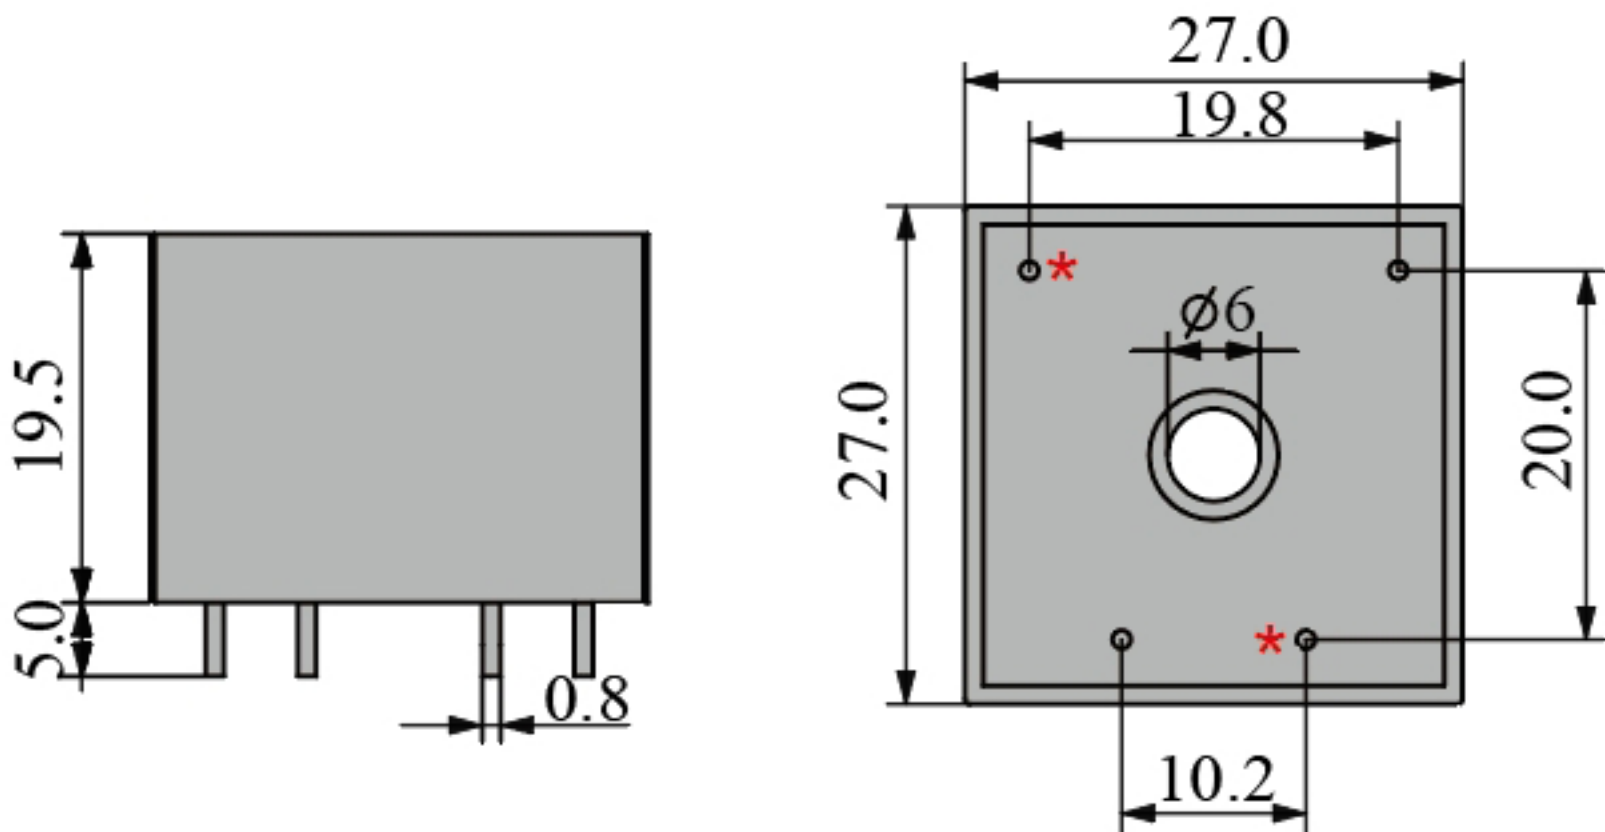
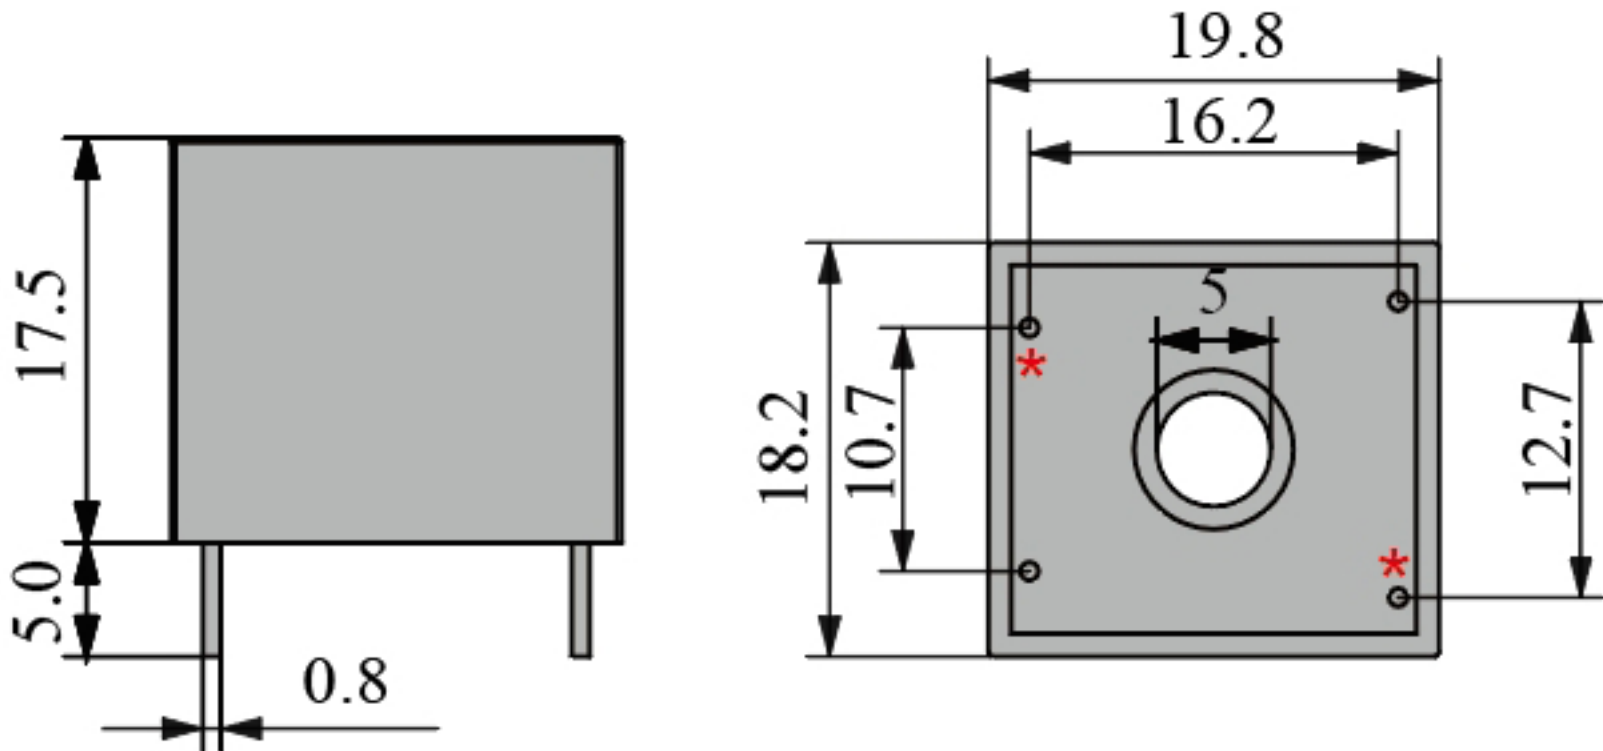


产品型号	PT223761/CT223761		
额定输入	10A	2mA	4mA
额定输出	5mA	2mA	4mA
推荐负载	200Ω	250Ω	200Ω
精度等级	0.1	0.2	0.2
外形尺寸	 The technical drawing illustrates the physical dimensions of the PT223761/CT223761 component. The front view (left) shows a trapezoidal body with a top width of 19.0, a bottom width of 19.0, and a height of 24.0. A central circular feature has a diameter of 5.0. The mounting pins are 7.5 high and 1.0 wide. The side view (right) shows a rectangular profile with a total width of 28.0, a central section width of 23.4, and a height of 13.0. Two mounting holes are indicated with red asterisks, spaced 10.0 apart.		

产品型号	CT223361		
额定输入	5A	10A	2mA
额定输出	2.5mA	5mA	2mA
推荐负载	200Ω	100Ω	250Ω
精度等级	0.1 / 0.2	0.1 / 0.2	0.2
外形尺寸	 The technical drawing illustrates the physical dimensions of the CT223361 component. The side view (left) shows a rectangular component with a height of 14.7 mm and a base thickness of 4.0 mm. The mounting pins have a diameter of 0.8 mm. The top view (right) shows a square footprint with an outer dimension of 18.0 mm and an inner dimension of 10.6 mm. The central circular feature has a diameter of 3.8 mm (indicated as $\phi 3.8$). The overall width of the component is 19.5 mm, and the distance between the mounting pins is 12.0 mm. The distance from the top edge to the center of the circular feature is 15.5 mm. Two red asterisks (*) are placed on the top view to indicate specific features or mounting points.		

产品型号	CT223561		
额定输入	20A	30A	2mA
额定输出	10mA	10mA	2mA
推荐负载	200Ω	200Ω	500Ω
精度等级	0.1 / 0.2	0.1 / 0.2	0.2
外形尺寸	 The technical drawing illustrates the physical dimensions of the CT223561 component. The side view (left) shows a rectangular component with a height of 19.5 and a base thickness of 5.0. The base features four mounting pins, with the central pins having a width of 0.8. The top view (right) shows a square footprint with overall dimensions of 27.0 by 27.0. A central circular feature has a diameter of 6 (Ø6). The inner square area, defined by the mounting holes, measures 19.8 by 20.0. The distance from the bottom edge to the bottom mounting holes is 10.2. Two red asterisks (*) mark the top-left and bottom-right mounting holes.		

产品型号	CT223461		
额定输入	5A	10A	2mA
额定输出	2.5mA	5mA	2mA
推荐负载	200Ω	100Ω	250Ω
精度等级	0.1 / 0.2	0.1 / 0.2	0.2
外形尺寸	 The technical drawing illustrates the physical dimensions of the CT223461 component. The left view is a side profile showing a main body height of 17.5, a base thickness of 5.0, and a mounting tab width of 0.8. The right view is a top-down perspective of the square component, which has an overall width of 19.8 and a height of 18.2. It features a central circular hole with a diameter of 5. The mounting holes are positioned 16.2 apart horizontally and 10.7 apart vertically from the bottom edge. Two red asterisks mark the mounting holes on the left and right sides.		

产品型号	PT223661/CT223661				
额定输入	10A	20A	30A	2mA	4mA
额定输出	5mA	10mA	10mA	2mA	4mA
推荐负载	200Ω	200Ω	200Ω	500Ω	250Ω
精度等级	0.1 / 0.2	0.1 / 0.2	0.1 / 0.2	0.2	0.2
外形尺寸	