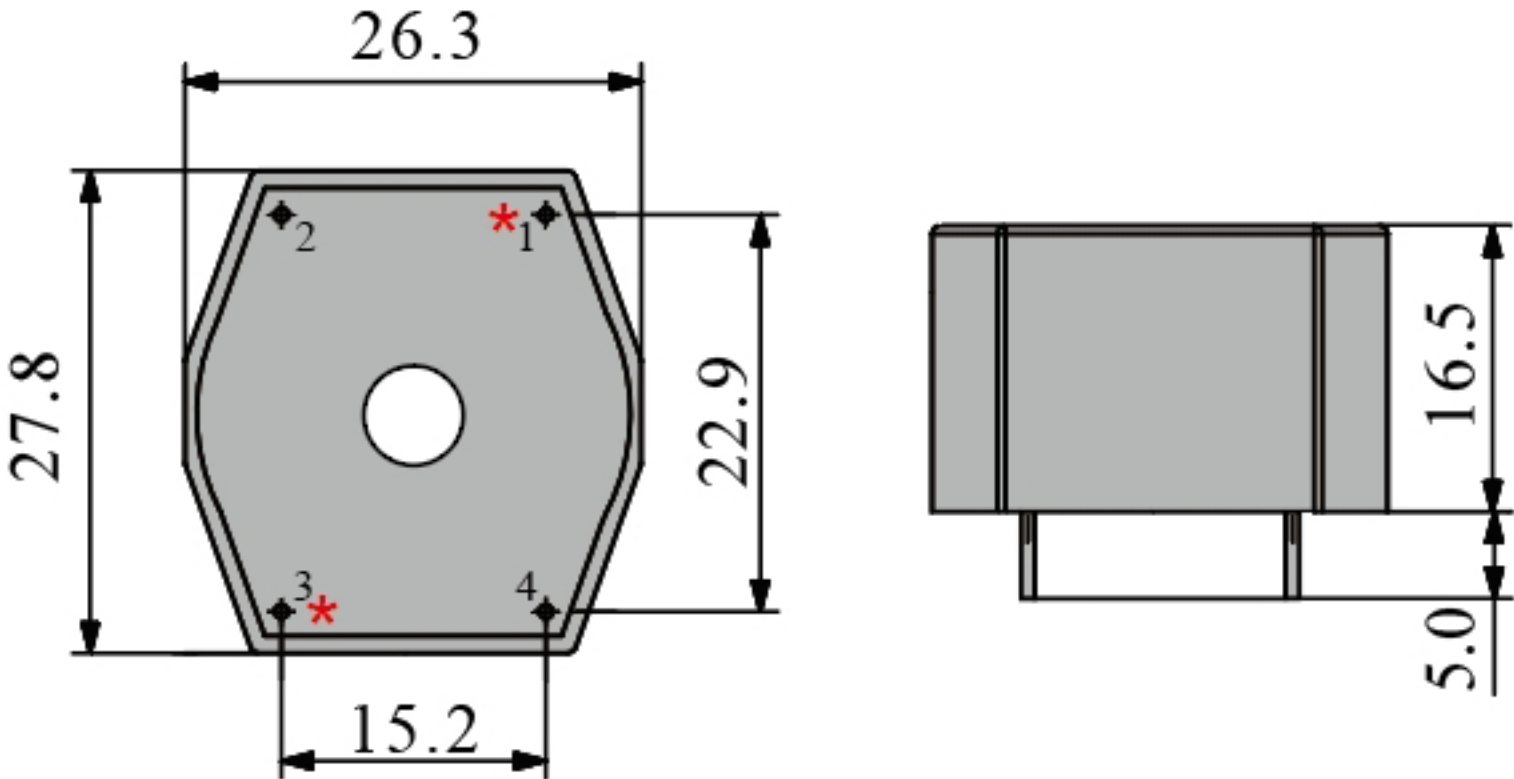
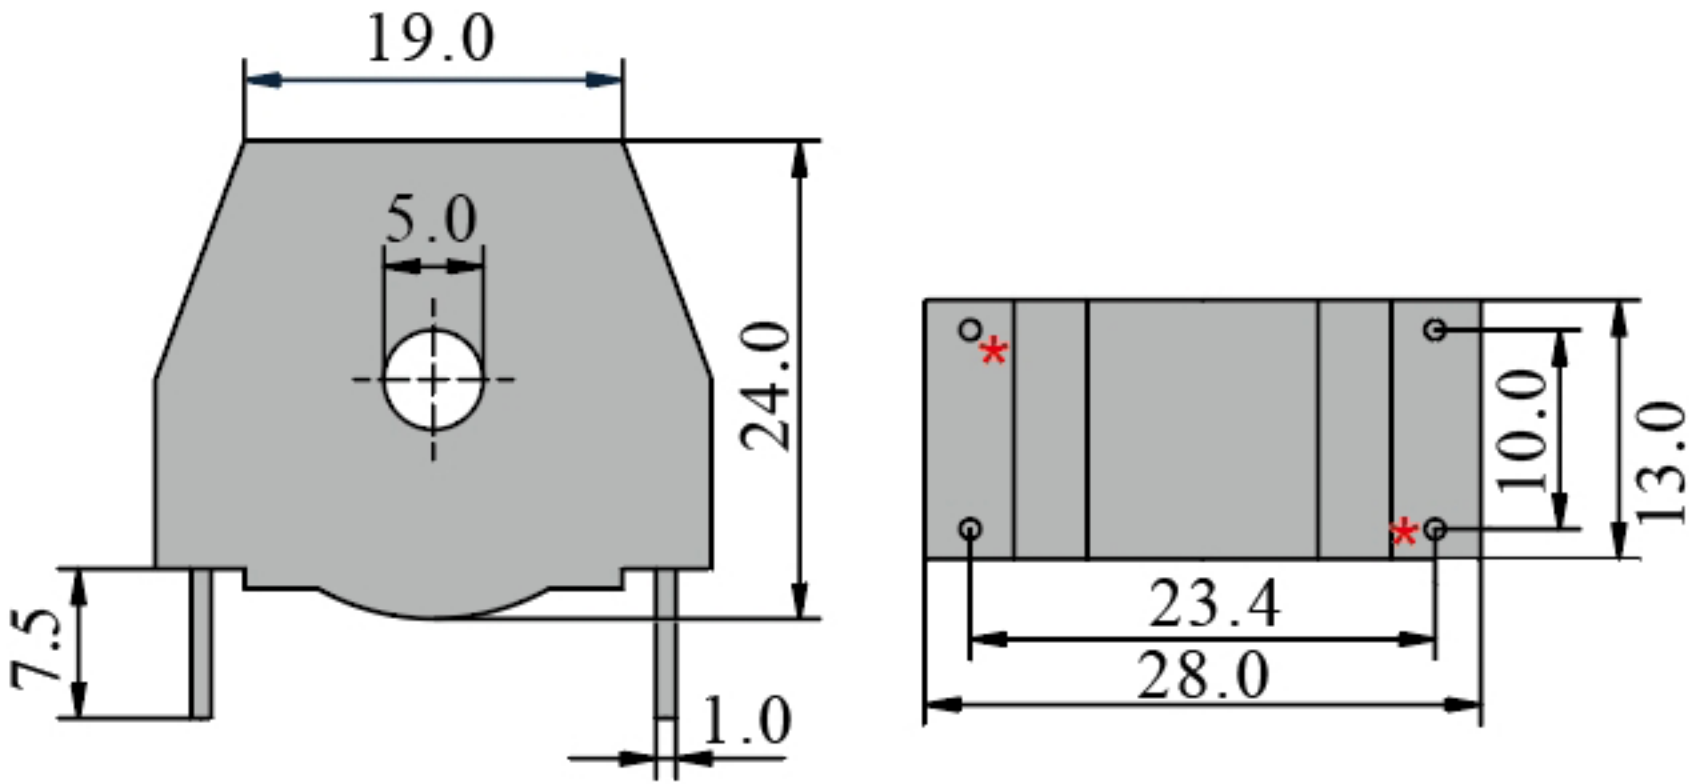
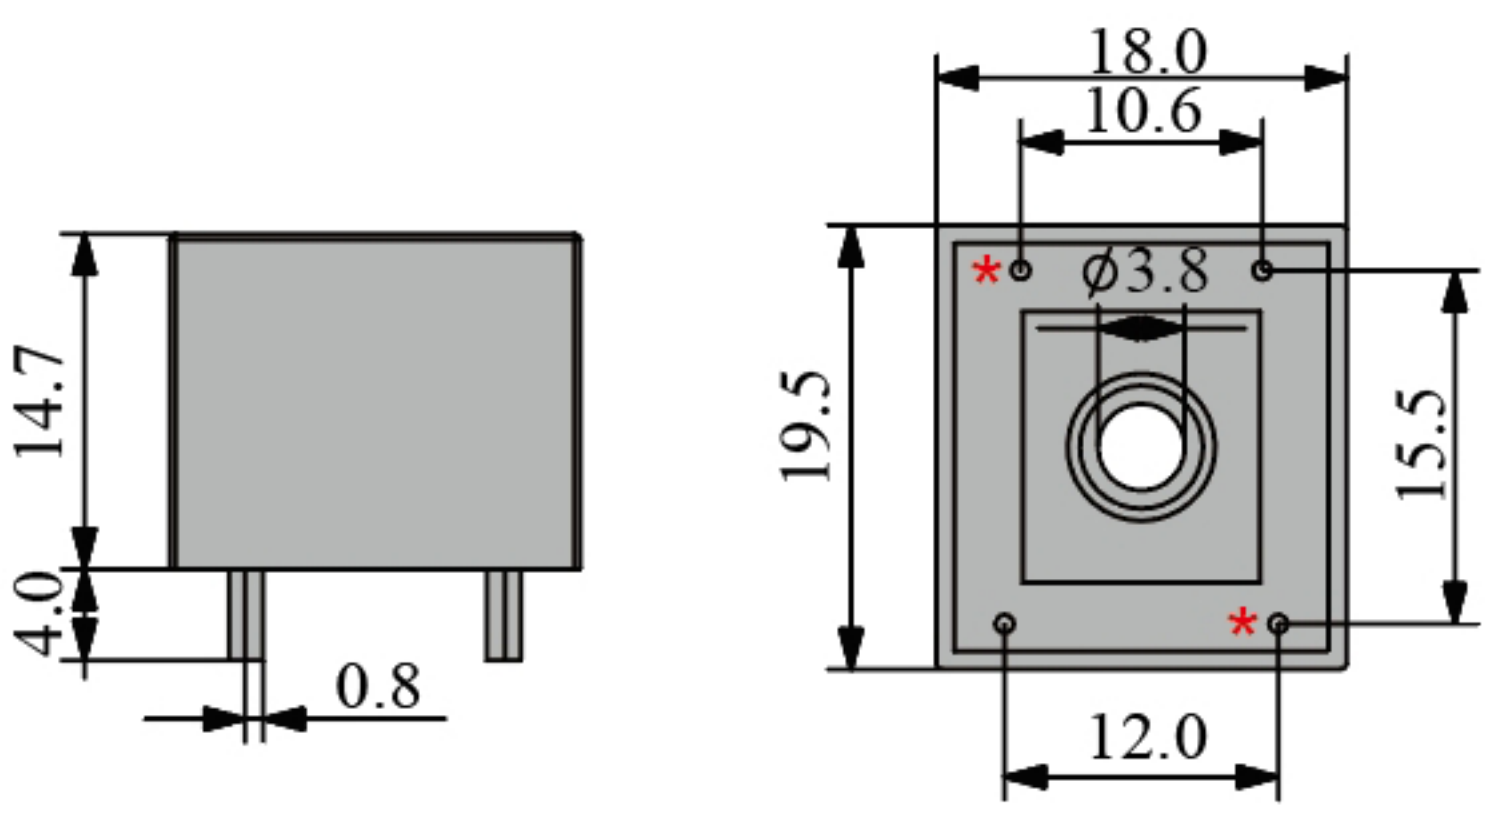
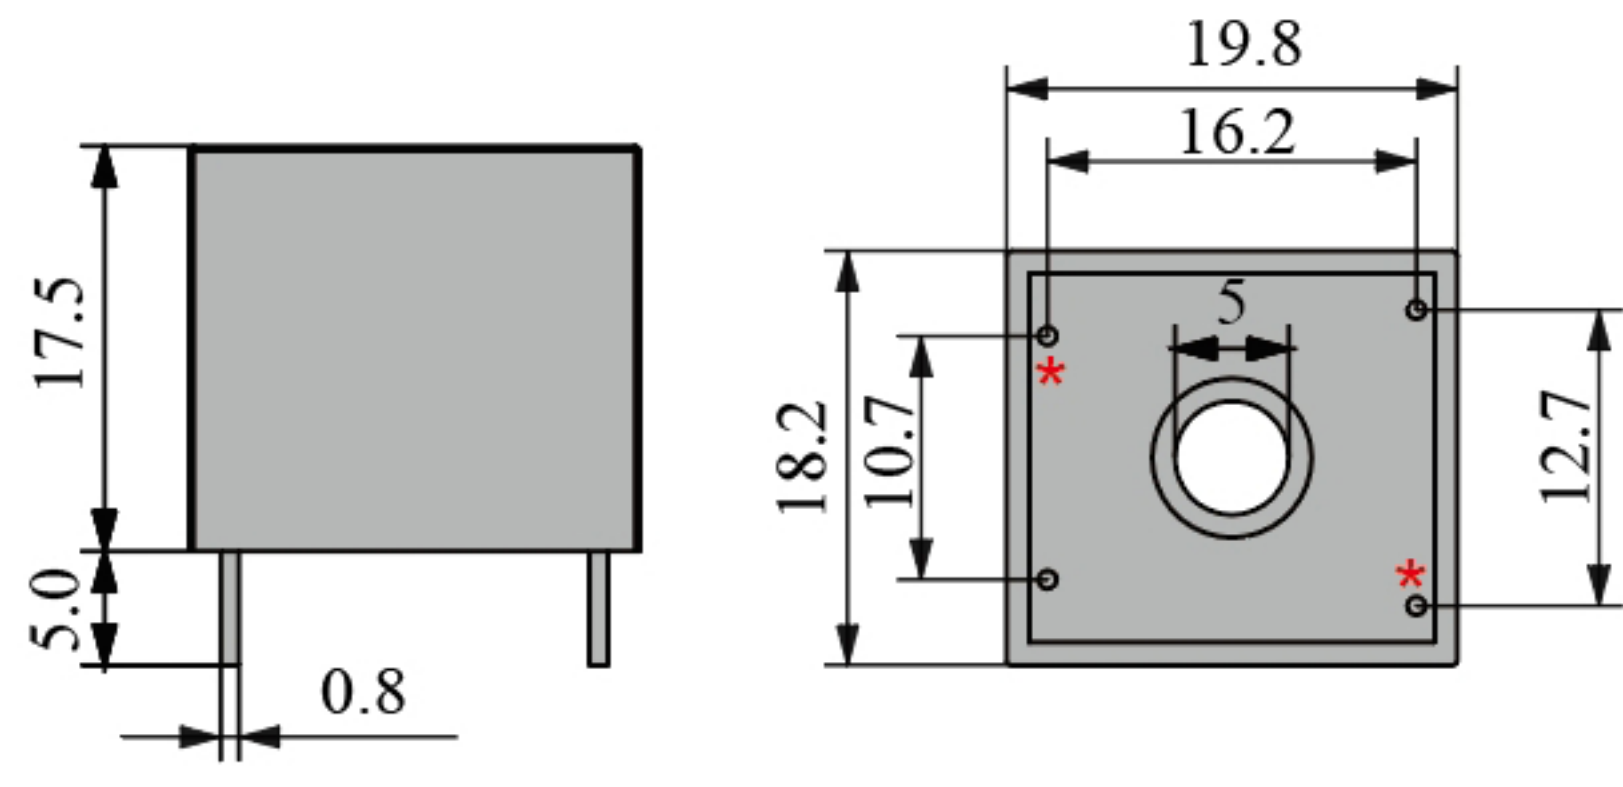
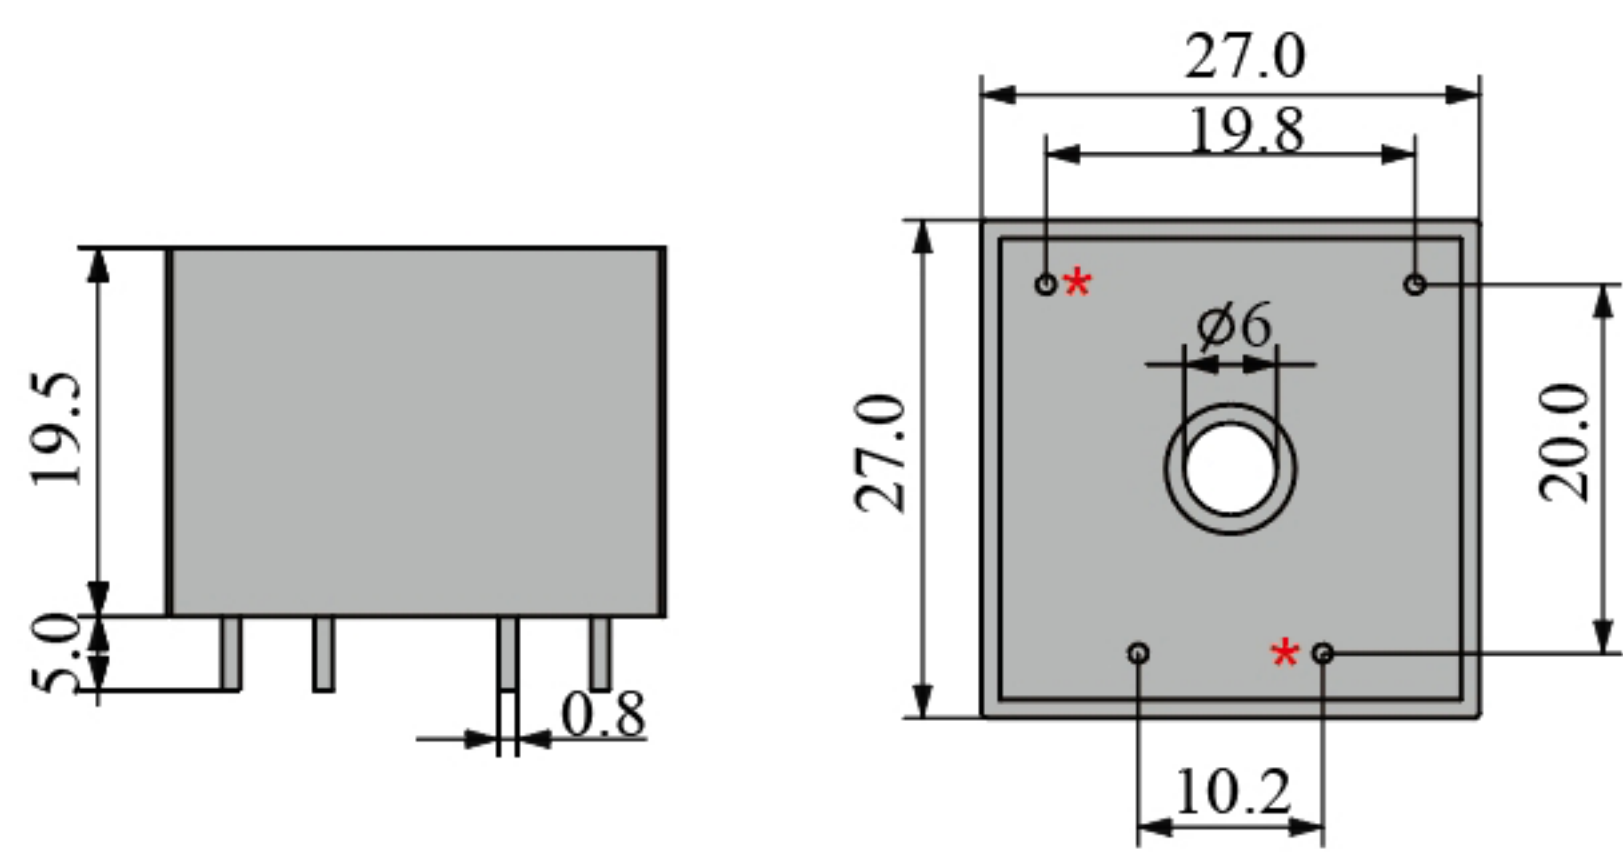


MODEL NUMBER	PT223661 / CT223661				
RATED INPUT	10A	20A	30A	2mA	4mA
RATED OUTPUT	5mA	10mA	10mA	2mA	4mA
OPTIMAL LOAD	200Ω	200Ω	200Ω	500Ω	250Ω
ACCURACY GRADE	0.1 / 0.2	0.1 / 0.2	0.1 / 0.2	0.2	0.2
DIMENSIONS	 The technical drawing shows two views of the component. The top view is a hexagonal shape with a central circular hole. It has four numbered points (1, 2, 3, 4) at the corners, with points 1 and 3 marked with a red asterisk. Dimensions for the top view are: top width 26.3, bottom width 15.2, left height 27.8, and right height 22.9. The side view shows a rectangular component with a height of 16.5 and a base width of 5.0.				

MODEL NUMBER	PT223761/CT223761		
RATED INPUT	10A	2mA	4mA
RATED OUTPUT	5mA	2mA	4mA
OPTIMAL LOAD	200Ω	250Ω	200Ω
ACCURACY GRADE	0.1	0.2	0.2
DIMENSIONS	 The technical drawing shows two views of the component. The top view (left) is a trapezoidal shape with a top width of 19.0, a bottom width of 1.0, and a height of 24.0. A central circular feature has a diameter of 5.0. The bottom view (right) is a rectangular shape with a width of 28.0 and a height of 13.0. It shows two mounting holes, each with a diameter of 10.0, and a central rectangular feature with a width of 23.4. Red asterisks mark the mounting holes.		

MODEL NUMBER	CT223361		
RATED INPUT	5A	10A	2mA
RATED OUTPUT	2.5mA	5mA	2mA
OPTIMAL LOAD	200Ω	100Ω	250Ω
ACCURACY GRADE	0.1 / 0.2	0.1 / 0.2	0.2
DIMENSIONS	 The technical drawing illustrates the physical dimensions of the CT223361 component. The side view (left) shows a rectangular component with a height of 14.7 mm, a base thickness of 4.0 mm, and a mounting tab width of 0.8 mm. The top view (right) shows a square footprint with overall dimensions of 18.0 mm by 15.5 mm. The central mounting hole has a diameter of 3.8 mm (indicated as $\phi 3.8$). The distance between the mounting holes is 10.6 mm, and the distance from the bottom edge to the mounting holes is 12.0 mm. Red asterisks (*) mark the mounting holes.		

MODEL NUMBER	CT223461		
RATED INPUT	5A	10A	2mA
RATED OUTPUT	2.5mA	5mA	2mA
OPTIMAL LOAD	200Ω	100Ω	250Ω
ACCURACY GRADE	0.1 / 0.2	0.1 / 0.2	0.2
DIMENSIONS	 The technical drawing illustrates the physical dimensions of the CT223461 component. The side view (left) shows a rectangular body with a height of 17.5, a base thickness of 5.0, and a mounting tab width of 0.8. The top view (right) shows a square footprint with an outer dimension of 19.8 and an inner dimension of 16.2. A central circular feature has a diameter of 5. The overall height from the base to the top of the square face is 18.2, and the height of the square face itself is 12.7. Two mounting holes are indicated by red asterisks (*).		

MODEL NUMBER	CT223561		
RATED INPUT	20A	30A	2mA
RATED OUTPUT	10mA	10mA	2mA
OPTIMAL LOAD	200Ω	200Ω	500Ω
ACCURACY GRADE	0.1 / 0.2	0.1 / 0.2	0.2
DIMENSIONS	 The technical drawings show the physical dimensions of the component. The side view (left) indicates a main body height of 19.5mm, a base thickness of 5.0mm, and a pin width of 0.8mm. The top view (right) shows a square footprint of 27.0mm by 27.0mm. The internal square area is 19.8mm by 20.0mm. A central circular hole has a diameter of 6mm (Ø6). Four mounting pins are located at the corners of the internal square, with a horizontal spacing of 10.2mm between the bottom pins. Two pins are marked with red asterisks (*).		